

00® Timers / Aquastat

Taco Clock Timers and the Temperature Aquastat are designed to operate Taco circulators for domestic hot water recirculation during peak demand periods. The 24-hour clock timer can be set in 15 minute on/off intervals. A 7-day digital plug-in timer can be set to run at varying times and intervals each day. Temperature control is easy with the Aquastat — automatically ON at 95°F and OFF at 115°F. Adaptable to any 00® Series Circulator.



265-1



265-DT



563-2



Submittal Data # 101-036
 Supersedes: 09/04/19

Effective: 08/09/24

24 Hour Analog Clock Timer

Performance Data — #265-1

Electrical Characteristics: 115/60/1
 Timer Switch: 16A @115V
 Timer Interval: 15 Minutes
 Clock face: Hour and Minute Hands
 Manual Switch: **I** Permanently ON
 ⌚ Automatic Operation
 O Permanently OFF

7 Day Digital Timer

Performance Data — #265-DT

Input Voltage: 120 VAC, 60 Hz
 Resistive (Heater): 15 A, 120 VAC
 Tungsten (Incandescent): 1000 W, 120 VAC
 Inductive (Fluorescent): 12 A, 120 VAC
 Motor: 1/2 HP, 120 VAC

Temperature Aquastat — Snap Action Temperature Switch — #563-2

Electrical Characteristics: 115/60/1
 Connections: 1/2" (Snap on circ. body)
 3/4" Copper pipe
 Temperature Setting: ON @ 95°F
 OFF @ 115°F
 Contacts: 7 amp SPDT Switch
 Wire Leads: 18" – Type 18-2,
 Round Premium Cable

Application

The Taco Clock Timers and Temperature Aquastat are designed to control the operation of Taco circulators on Domestic Hot Water Recirculation Systems for maximum comfort and energy efficiency. They are adaptable to any 00® Series circulator by attaching the enclosure or wiring to the electrical box.

24 Hour Analog Timer

Operates the circulator at the same pre-set times every day. Time intervals are in 15 minute increments. This user friendly clock has a raised minute hand for easy adjustments, quick-set trippers and an operation switch for Manual ON/OFF or Automatic modes.

7-Day Digital Plug-in Timer

Twenty-eight programmable events allow you to customize the hot water run times to meet the household demand. Its intuitive logic can automatically adjust to daylight savings time, and the convenient dial simplifies programming. A battery backup will retain your settings for up to three months with no power.

Temperature Aquastat


Controls pump operation to maintain system temperature between 95°F and 115°F. Easy clip-on Aquastat attaches directly to 3/4" pipe or a 1/2" sweat pump casing.

Shipping Weight


Model	Item	Lbs.	Kg
265-1	Analog Timer	.75	.35
265-DT	Digital Timer	.5	.23
563-2	Aquastat	.25	.11



FOR INDOOR USE ONLY

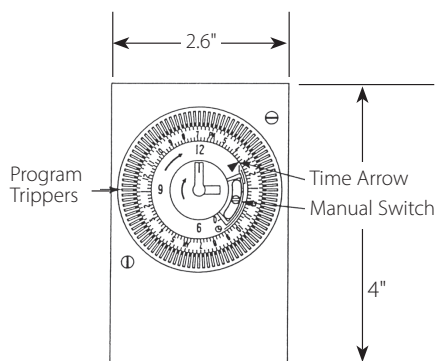

Analog Timer

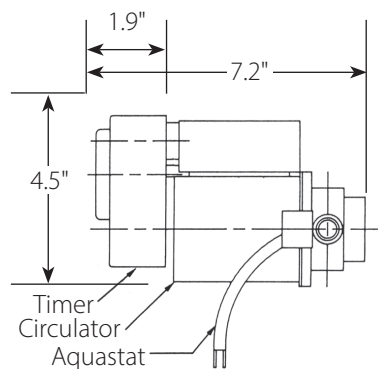

Assembled Timer/Aquastat



Taco Inc., 1160 Cranston Street, Cranston, RI 02920 / (401) 942-8000
 Taco (Canada) Ltd., 8450 Lawson Road, Unit #3, Milton, Ontario L9T 0J8 / (905) 564-9422