

CI Series Pump | Submittal Data

Submittal No: 301-1336D | Model: 2511D | RPM: 1760 - 60 Hz | Effective: January 27, 2020 | Supersedes: July 12, 2018

JOB: _____

REPRESENTATIVE: _____

ENGINEER: _____

CONTRACTOR: _____

PRODUCT DATA

ITEM NO. _____ MODEL NO. 2511D

IMPELLER DIAMETER _____ HORSEPOWER _____

GPM _____ VOLTAGE _____

HEAD/FT _____ RPM 1760

WEIGHT _____ PUMP/MOTOR _____

NSF 61 CERTIFIED YES NO

DIMENSIONS

Model No. | 2511D
Flange Size (Suction x Discharge) | 3 x 2 1/2 (76 x 64)

HORSEPOWER		5	7.5	10	15
ODP	MOTOR FRAME	184JM	213JM	215JM	254JM
	G MAX	15.26 (388)	15.47 (393)	16.60 (422)	19.44 (494)
	MAXIMUM ASSEMBLY WEIGHT LBS. (KG)	268 (122)	347 (158)		444 (201)
TEFC	MOTOR FRAME	184JM	213JM	215JM	254JM
	G MAX	15.26 (388)	16.64 (423)	18.11 (460)	20.05 (509)
	MAXIMUM ASSEMBLY WEIGHT LBS. (KG)	268 (122)	347 (158)		444 (201)
A		ANSI Class 125: 4.72 (120)			
		ANSI Class 250: 5.09 (129)			
B		ANSI Class 125: 11.5 (292)			
		ANSI Class 250: 11.81 (300)			
C (MOTOR)		7.5 (191)	8.5 (216)		10.0 (254)
D		6.5 (165)	8.0 (203)		9.5 (241)
E		4.50 (114)	5.25 (133)		6.25 (159)
F		9.84 (250)			
H (PUMP)		12.40 (315)			
J		4.72 (120)			
K		ANSI Class 125: 2.35 (60)			
		ANSI Class 250: 2.73 (69)			
L		5.86 (149)	7.11 (181)		8.03 (204)
N (PUMP)		0.56 (14)			
P		0.41 (10)			0.53 (13)
R		5.50 (140)		7.0 (178)	8.25 (210)
S		ANSI Class 125: 9.34 (237)			ANSI Class 125: 10.01 (254)
		ANSI Class 250: 9.72 (247)			ANSI Class 250: 10.39 (264)

Configuration	DOE Basic Model Number	PEI Value		Energy Rating
Bare Pump	CI2511D-4P-BP	PEI _d	0.86	14
Pump + Motor	CI2511D-4P-PM	PEI _d	0.86	14



OPERATING SPECIFICATIONS

FLANGE	PRESSURE	TEMPERATURE
ANSI Class 125	175 PSIG* (1210 KPA)	250°F (120°C)
ANSI Class 250	300 PSIG** (2070 KPA)	250°F (120°C)

Motors: All NEMA Standard (JM Frame)

* In accordance with ANSI Standard B16.1 Class 125

** In accordance with ANSI Standard B16.1 Class 250

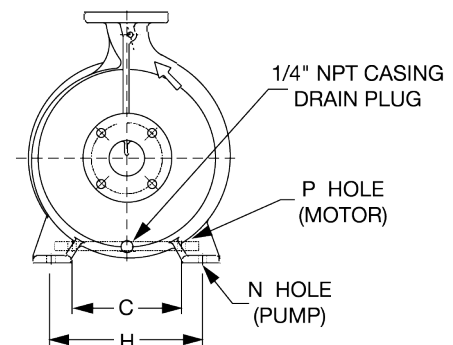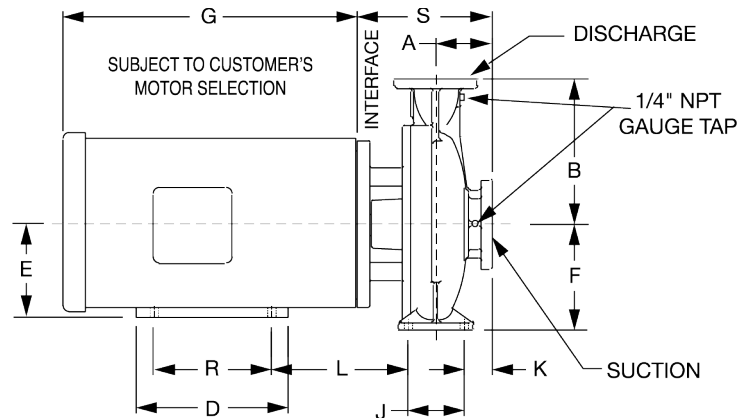

MATERIALS OF CONSTRUCTION			CASING	COVER	IMPELLER	WEAR RING	SHAFT	SHAFT SLEEVE	MECHANICAL SEAL	SEAL FLUSH LINE ASSEMBLY
STANDARD CONSTRUCTION	BRONZE FITTED	125# FLANGE	Cast Iron ASTM A48/A48M-03 Class 30A	Cast Iron ASTM A48/A48M-03 Class 30A	Bronze ASTM B584 ALLOY C83600 or C84400	N/A	Carbon Steel	Bronze ASTM B584-98A C92200	Ceramic/EPT	N/A
		250# FLANGE	Ductile Iron ASTM A536-84 Grade 65-45-12	Cast Iron ASTM A48/A48M-03 Class 30A	Bronze ASTM B584 ALLOY C83600 or C84400	N/A	Carbon Steel	Bronze ASTM B584-98A C92200	Ceramic/EPT	N/A
OPTIONAL		125# OR 250#	N/A	N/A	Stainless Steel ASTM A351/A 351M-08	Bronze ASTM B584-98A C92200	N/A	Stainless Steel TYPE 303 ASTM A276	Tyngsten Carbide /EPT or Silicon-Carbide/EPT	Copper & Brass C3600
STANDARD CONSTRUCTION	NSF 61	125# FLANGE	Cast Iron ASTM A48/A48M-03 Class 30A	Cast Iron ASTM A48/A48M-03 Class 30A	Stainless Steel ASTM A351/A 351M-08	N/A	Carbon Steel	Bronze ASTM B584-98A C92200	Ceramic/EPT	Copper & Brass C3600
		250# FLANGE	Ductile Iron ASTM A536-84 Grade: 65-45-12	Cast Iron ASTM A48/A48M-03 Class 30A	Stainless Steel ASTM A351/A 351M-08	N/A	Carbon Steel	Bronze ASTM B584-98A C92200	Ceramic/EPT	Copper & Brass C3600
OPTIONAL		125# OR 250#	N/A	N/A	N/A	Bronze ASTM B584-98A C92200	N/A	N/A	N/A	N/A

N/A - Not Available




CI Series | Model: 2511D | 1760 RPM

Curve No. 4226 | Min. Imp. Dia. 8.0" | Size 3x2.5x11.0 | February 03, 2020

Comfort Solutions
A Taco Family Company

Energy Efficiency Rating: DOE Basic Model Number: CI2511D-4P-PM
Pump & Motor: PE_{CL} : 0.86 | ER_{CL} : 14

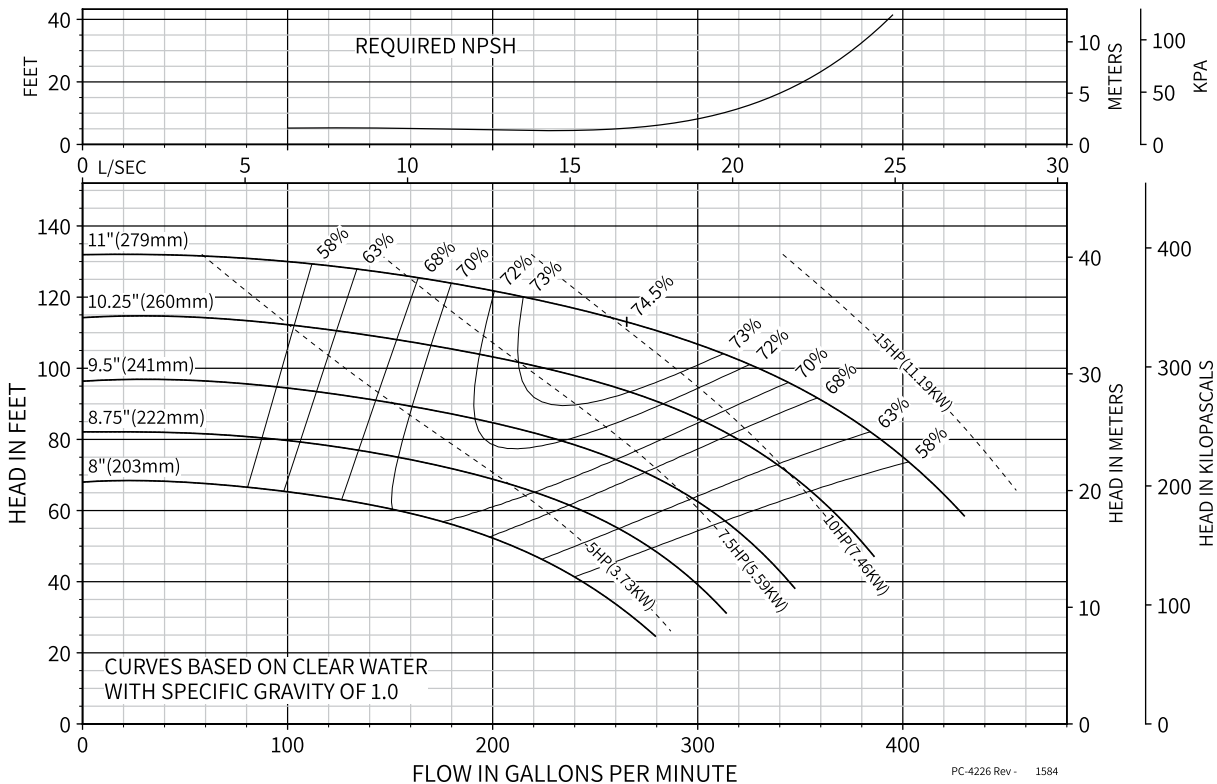

COMMENTS