

SUPERSEDES: June 1, 2011

EFFECTIVE: June 1, 2012

Job: _____


ITEM	LOCATION	MODEL	QUANTITY	GALLONS
------	----------	-------	----------	---------

SPECIFICATIONS

- Designed and constructed per ASME Code Section VIII, Division 1.
- Construction: Carbon Steel with exterior red oxide primer finish
- Maximum Design Pressure and Temperature: 125 psi @ 375°F
- Grooved inlet and outlet System Connections (standard sizes shown)
- Registered with the National Board of Pressure Vessel Manufacturers

OPTIONS (Consult Factory)

- Optional materials of construction
- Higher design pressures and temperatures
- Optional System Connection sizes available
- Thermal insulation
 - ☐ Chilled Water 1/2" Armaflex
 - ☐ Heating Water 1" Silicon Blanket

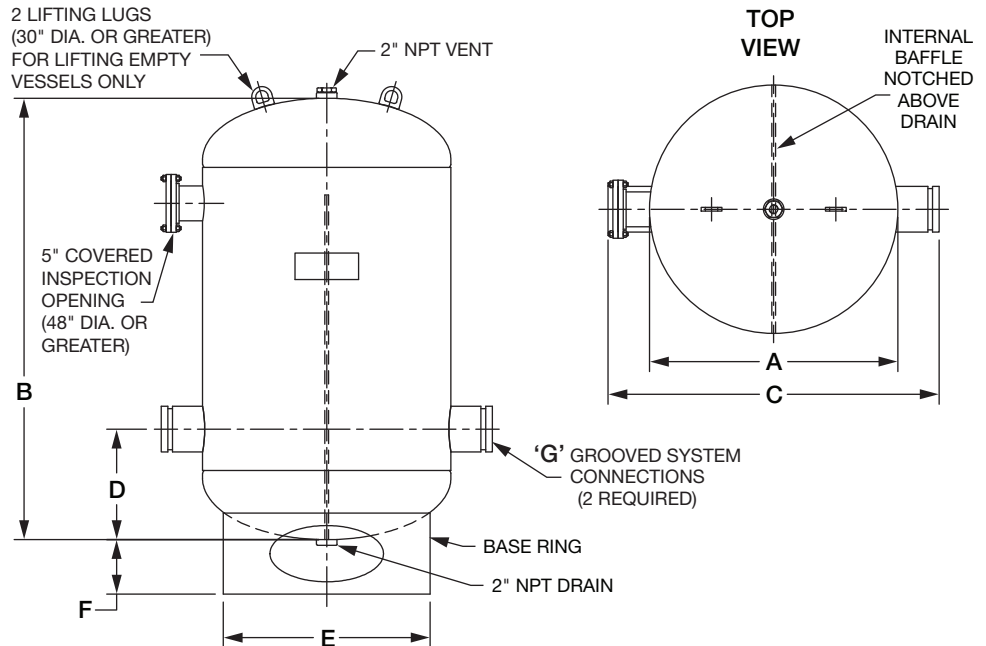

SIZES & DIMENSIONS

All dimensions shown are subject to change and should not be used for pre-piping.
Contact your local Taco representative should certified dimensional drawings be required.

MODEL NUMBER	TANK VOLUME	A DIAMETER	B	C	D	E DIAMETER	F	G	APPROX. WEIGHT
	GAL.	INCH	INCH	INCH	INCH	INCH	INCH	SIZE	LBS.
BTL0050G02-125N	50	20	43	30	11½	16	6¾	2"	165
BTL0075G02-125N	75	24	46	34	12⅝	20	6¾	2"	215
BTL0100G02-125N	100	24	61	34	12⅝	20	6¾	2"	255
BTL0125G02-125N	125	24	76	34	12⅝	20	6¾	2"	305
BTL0150G02-125N	150	30	60	40	14¼	24	8	2"	485
BTL0180G02-125N	180	30	71	40	14¼	24	8	2"	565
BTL0200G02-125N	200	30	78	40	14¼	24	8	2"	605
BTL0250G03-125N	250	36	69	46	16¼	30	7⅞	3"	680
BTL0300G03-125N	300	36	82	46	16¼	30	7⅞	3"	790
BTL0350G03-125N	350	36	94	46	16¼	30	7⅞	3"	880
BTL0400G04-125N	400	48	65	58	18⅞	40	8⅝	4"	960
BTL0450G04-125N	450	48	72	58	18⅞	40	8⅝	4"	1030
BTL0500G04-125N	500	48	79	58	18⅞	40	8⅝	4"	1110
BTL0700G04-125N	700	48	100	58	18⅞	40	8⅝	4"	1250
BTL0850G04-125N	850	54	99	64	22⅝	44	9⅞	4"	1830
BTL1050G06-125N	1050	60	99	70	24¾	50	9¾	6"	2070

COMMENTS: _____

