

SUPERSEDES: January 5, 2017

EFFECTIVE: September 24, 2018

JOB _____ ENGINEER _____ CONTRACTOR _____ REP. _____

ITEM	QUANTITY	MODEL NUMBER	SIZE
------	----------	--------------	------

SPECIFICATIONS

- Designed and constructed per ASME Code Section VIII Div. 1
- Registered with the National Board of Pressure Vessel Manufacturers
- Standard Design Pressure and Temperature: 125 psi @ 240°F
- Construction: Carbon Steel with exterior red oxide primer finish
- 304 Stainless Steel Coalescence Pall Rings
- Taco 4900 units are designed to be self-supporting in the piping system. Factory review is necessary should any piping loads be present.


CAUTION: LIFTING LUGS FOR RIGGING AND LIFTING USE ONLY, NOT FOR ANCHORING OR HANGING.

FACTORY INSTALLED

- Air Vent is suitable for water, max. 50% glycol
- Flush Valve

OPTIONS

- Higher Design Pressures and Temperatures
 - ☐ 150 psi @ 240°F, Available
- Optional System Connection Sizes available
- Optional Base Ring
 - ☐ Add Suffix 'R' (4905 thru 4916) Exp. 4912AD-125R
 - Not Available (4902 thru 4904)

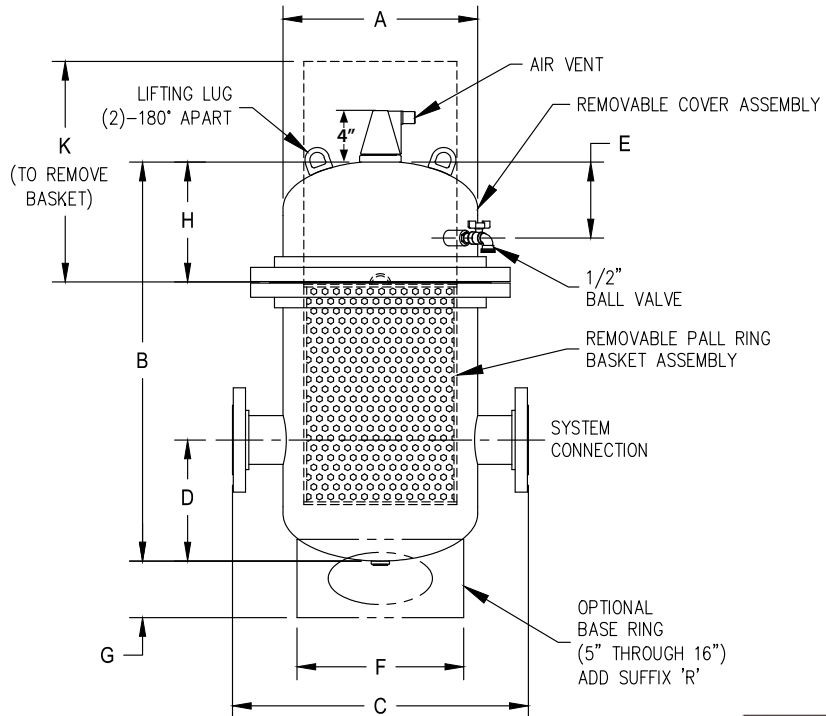

PIPE SIZE	MODEL NUMBER ⁽¹⁾	A DIA. (INCH)	B MAX. (INCH)	C (INCH)	D (INCH)	E (INCH)	F DIA. (INCH)	G (INCH)	H (INCH)	K (INCH)	GPM @ 4.9 ft./sec.	APPROX. WGT. (LBS)
2	4902ATR-125	10	20	12*	7½	5¼	—	—	8	11	51	85
2	4902AR-125	10	20	20	7½	5¼	—	—	8	11	51	85
2½	49025ATR-125	10	20	12*	7½	5¼	—	—	8	11	73	90
2½	49025AR-125	10	20	20	7½	5¼	—	—	8	11	73	90
3	4903ATR-125	12	23	14½*	8⅝	6	—	—	9	12	113	125
3	4903AR-125	12	23	22	8⅝	6	—	—	9	12	113	125
4	4904AR-125	12	23	22	8⅝	6	—	—	9	12	204	130
5	4905AR-125	14	29½	24	10½	6	12	6¾	10	17	306	380
6	4906AR-125	14	29½	24	10½	6	12	6¾	10	17	469	385
8	4908AR-125	18	36⅝	28	13¼	7¼	14	7	12	21	816	550
10	4910AR-125	24	47¾	36	16⅞	8⅞	20	6¾	15	28	1291	1000
12	4912AR-125	24	54¾	36	17⅞	8⅞	20	6¾	15	35	1837	1030
14	4914AR-125	30	63	42	22	10½	24	8	18	38	2106	1300
16	4916AR-125	30	68¾	42	22	10½	24	8	18	44	2790	1350

*DIMENSIONS FOR "T" OPTION ONLY ⁽¹⁾ FOR 150 PSI MODEL NUMBERS, REPLACE -125 WITH -150

