

4900 Series Air Separators

Submittal Data

Submittal No: 401-091 | Effective: May 6, 2022 | Supersedes: January 5, 2017

JOB: _____

REPRESENTATIVE: _____

ENGINEER: _____

CONTRACTOR: _____

PRODUCT DATA

ITEM NO. _____ LOCATION _____

MODEL NO. _____ QUANTITY _____

GPM _____

SPECIFICATIONS

- Designed and constructed per ASME Code Section VIII Div. 1
- Registered with the National Board of Pressure Vessel Manufacturers
- Standard Design Pressure and Temperature: 150 psi @ 240°F
- Particle removal down to 5 microns
- Construction: Carbon Steel with exterior red oxide primer finish
- 304 Stainless Steel Coalescence Pall Rings


FACTORY INSTALLED

- Air Vent is suitable for water, max. 50% glycol
- Flush Valve

OPTIONS

- Higher design pressures and temperatures - Consult factory
- Base Ring
 - Standard on (4918 thru 4936)

CAUTION: LIFTING LUGS FOR RIGGING AND LIFTING USE ONLY, NOT FOR ANCHORING OR HANGING.

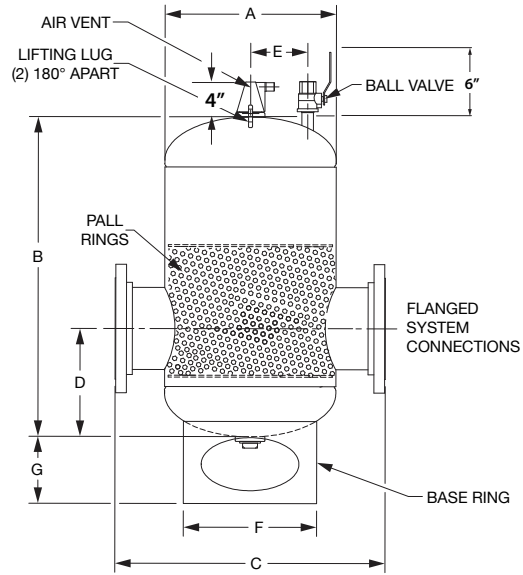

SIZES & DIMENSIONS

All dimensions shown are subject to change and should not be used for prepping. Contact your local Taco representative should certified dimensional drawings be required.

PIPE SIZE	MODEL NUMBER	A DIA. (INCH)	B MAX. (INCH)	C (INCH)	D (INCH)	E (INCH)	F DIA. (INCH)	G (INCH)	GPM @ 4.9ft/sec	APPROX. WEIGHT (LBS.)
18	4918A-150	36	75 1/2	48	26 7/8	9	30	7 11/16	3673	1480
20	4920A-150	42	84	54	29 7/8	10 1/2	35	7 5/8	4561	2180
22	4922A-150	48	91	60	33 3/8	12	40	8 7/16	5300	2875
24	4924A-150	48	98	60	33 3/8	12	40	8 7/16	6346	3100
26	4926A-150	54	106 1/2	67	37 1/4	13 1/2	44	9 1/2	7647	4270
30	4930A-150	60	122 1/2	74	40 7/8	15	50	9 7/8	10262	6365
36	4936A-150	72	146	90	50 5/8	15	64	12 3/4	14905	10930

COMMENTS