





Taco Booster Submittal Information

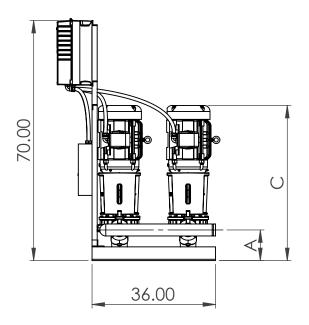



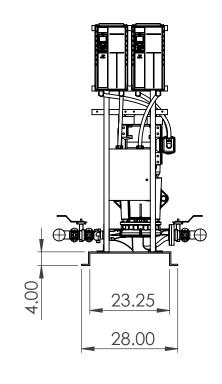

Pump	Α	В		Cmax
Model		150#	300#	
KS1506	8.7	43.4	43.9	38.3
KV1507	8.5	44.4	45.0	38.2
KV1509	8.4	44.4	45.0	50.5
KV2006	8.9	35.6	36.1	38.8
KV2007	9.0	37.1	37.6	45.0
KV2009	8.9	39.1	39.6	50.5
KV3006	9.0	42.0	42.7	38.8
KV3007	10.3	43.5	44.2	51.7

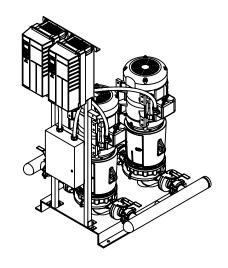

Booster Info Section		
Project:		
Rep.:		
Model:		
Pump Details:		
Total Package Flow (USGPM)		
Total Package Head (ft):		
Sequence of Operation:		
Header Size:		
Motor Enclosure:		
Motor Electrics:		
Integrated Driv	e Controller Enclosure: UL type	

UL/CSA Labelled Dual DC-link chokes (5% AC line reactor) Protocols (Standard): BacNet, Modbus RTU, N2 Metasys, FLN Apogee, FC Protocol

NOTES:

- Not to be used for construction/piping unless certified
 Control Panel arrangement/design may vary
 Dimensions are approx.
 Maximum operating pressure is

WT	05/14/2021
DRW BY:	DATE:
Model:	

E:		
N/A	Comfort	
	THIS DRAWING	

Taco Canada LTD. 8450 Lawson road Unit 3 Milton, ON, L9T0J8

WEIGHT:

TOLERANCES UNLESS OTHER SPECIFIED SCALE: NTS MODIFICATION REV DATE DRW BY Angle: ±1/2' TAG: SHEET 1 OF 1