

CI Series Pump | Submittal Data

Submittal No: 301-1364D | Model: 1206D | RPM: 2900 - 50 Hz | Effective: January 27, 2020 | Supersedes: May 2, 2019

JOB: _____

REPRESENTATIVE: _____

ENGINEER: _____

CONTRACTOR: _____

PRODUCT DATA

ITEM NO. _____ MODEL NO. 1206D

IMPELLER DIAMETER _____ HORSEPOWER _____

GPM _____ VOLTAGE _____

HEAD/FT _____ RPM 2900

WEIGHT _____ PUMP/MOTOR _____

NSF 61 CERTIFIED YES NO

DIMENSIONS

Model No. | 1206D

Flange Size (Suction x Discharge) | 2 x 1 1/4 (51 x 32)

HORSEPOWER		2	3	5
ODP	MOTOR FRAME	145JM	145JM	182JM
	G MAX	11.15 (283)	11.15 (283)	13.76 (350)
	MAXIMUM ASSEMBLY WEIGHT LBS. (KG)	130 (59)	130 (59)	167 (76)
TEFC	MOTOR FRAME	145JM	182JM	184JM
	G MAX	11.15 (283)	13.76 (350)	15.26 (388)
	MAXIMUM ASSEMBLY WEIGHT LBS. (KG)	130 (59)	167 (76)	182 (82)
A		ANSI Class 125: 3.75 (95)		
		ANSI Class 250: 4.00 (102)		
B		ANSI Class 125: 6.25 (159)		
		ANSI Class 250: 6.50 (191)		
C (MOTOR)		5.5 (140)	7.5 (191)	
D		5.94 (151)	6.50 (165)	
E		3.50 (89)	4.50 (114)	
F		5.20 (132)		
H (PUMP)		7.48 (190)		
J		2.76 (70)		
K		ANSI Class 125: 2.37 (60)		
		ANSI Class 250: 2.63 (67)		
L		5.66 (144)	6.29 (160)	
N (PUMP)		0.56 (14)		
P		0.34 (9)	0.41 (10)	
R		5.00 (127)	4.50 (115)	
S		ANSI Class 125: 7.92 (201)		
		ANSI Class 250: 8.18 (208)		

Configuration	DOE Basic Model Number	PEI Value		Energy Rating
Bare Pump	CI1206D-2P-BP	PEI _d	0.92†	8†
Pump + Motor	CI1206D-2P-PM	PEI _d	0.92†	8†

†PEI/ER values based on 60Hz test.



OPERATING SPECIFICATIONS

FLANGE	PRESSURE	TEMPERATURE
ANSI Class 125	175 PSIG* (1210 KPA)	250°F (120°C)
ANSI Class 250	300 PSIG** (2070 KPA)	250°F (120°C)

Motors: All NEMA Standard (JM Frame)

* In accordance with ANSI Standard B16.1 Class 125

** In accordance with ANSI Standard B16.1 Class 250

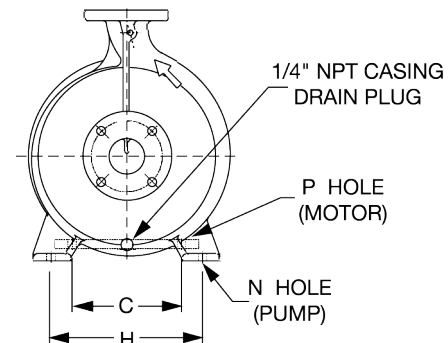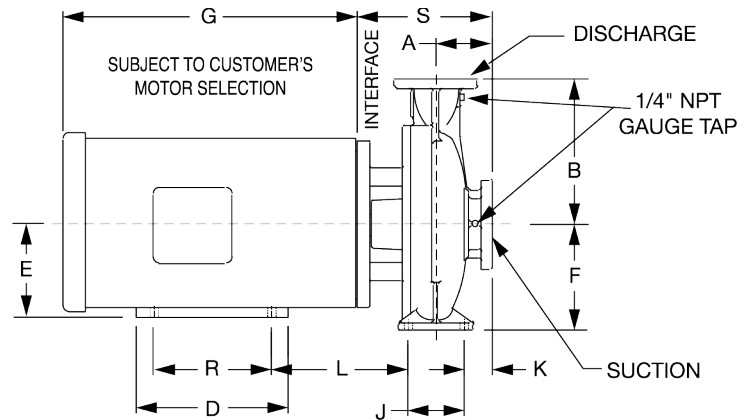

MATERIALS OF CONSTRUCTION			CASING	COVER	IMPELLER	WEAR RING	SHAFT	SHAFT SLEEVE	MECHANICAL SEAL	SEAL FLUSH LINE ASSEMBLY
STANDARD CONSTRUCTION	BRONZE FITTED	125# FLANGE	Cast Iron ASTM A48/A48M-03 Class 30A	Cast Iron ASTM A48/A48M-03 Class 30A	Bronze ASTM B584 ALLOY C83600 or C84400	N/A	Carbon Steel	Bronze ASTM B584-98A C92200	Ceramic/EPT	N/A
		250# FLANGE	Ductile Iron ASTM A536-84 Grade 65-45-12	Cast Iron ASTM A48/A48M-03 Class 30A	Bronze ASTM B584 ALLOY C83600 or C84400	N/A	Carbon Steel	Bronze ASTM B584-98A C92200	Ceramic/EPT	N/A
OPTIONAL		125# OR 250#	N/A	N/A	Stainless Steel ASTM A351/A 351M-08	Bronze ASTM B584-98A C92200	N/A	Stainless Steel TYPE 303 ASTM A276	Tyngsten Carbide /EPT or Silicon-Carbide/EPT	Copper & Brass C3600
STANDARD CONSTRUCTION	NSF 61	125# FLANGE	Cast Iron ASTM A48/A48M-03 Class 30A	Cast Iron ASTM A48/A48M-03 Class 30A	Stainless Steel ASTM A351/A 351M-08	N/A	Carbon Steel	Bronze ASTM B584-98A C92200	Ceramic/EPT	Copper & Brass C3600
		250# FLANGE	Ductile Iron ASTM A536-84 Grade: 65-45-12	Cast Iron ASTM A48/A48M-03 Class 30A	Stainless Steel ASTM A351/A 351M-08	N/A	Carbon Steel	Bronze ASTM B584-98A C92200	Ceramic/EPT	Copper & Brass C3600
OPTIONAL		125# OR 250#	N/A	N/A	N/A	Bronze ASTM B584-98A C92200	N/A	N/A	N/A	N/A


N/A - Not Available



CI Series | Model: 1206D | 2900 RPM

Curve No. 4181 | Min. Imp. Dia. 4.25" | Size 2x1.25x6.25 | April 16, 2020

Energy Efficiency Rating: DOE Basic Model Number: CI1206D-2P-PM
Pump & Motor: PEI_{CL} : 0.92[†] | ER: 8[†]

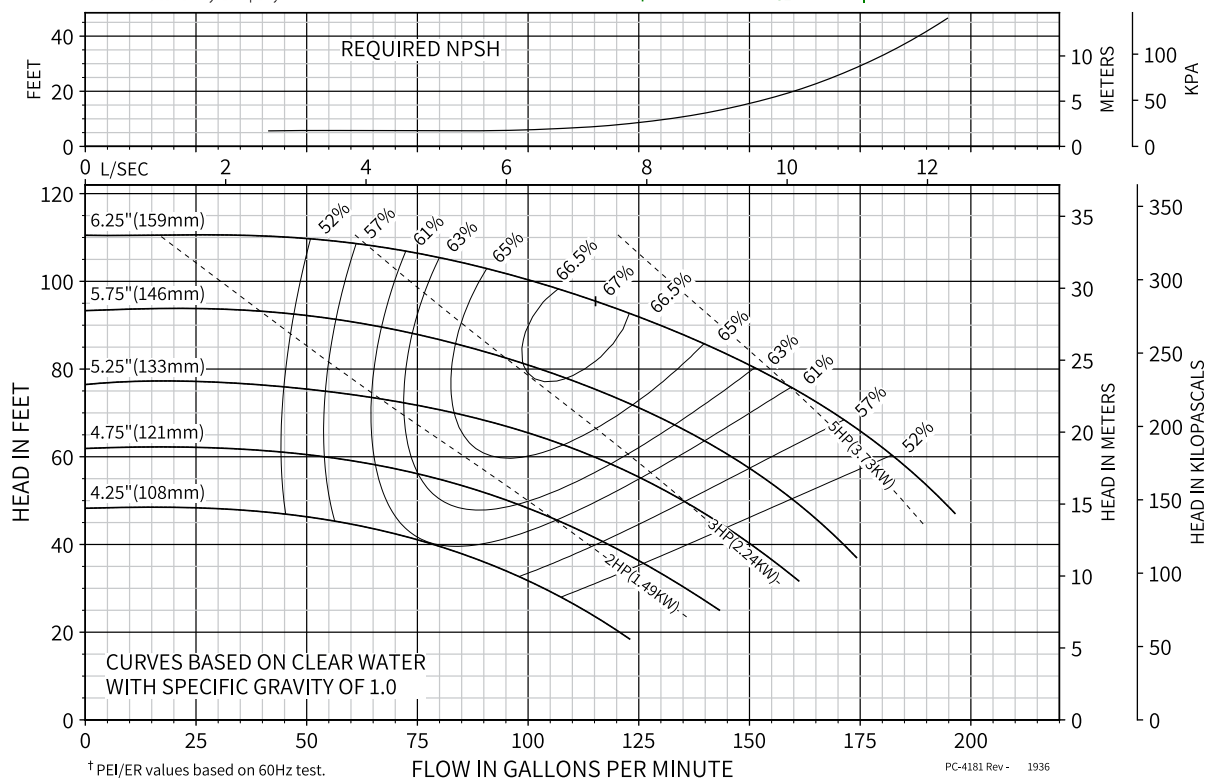

COMMENTS