



Submittal Data Information

Horizontal Split Case Pumps (60 Hz – NEMA)

301-2672

EFFECTIVE: 08/01/2024

SUPERSEDES: 07/12/2018

1760 RPM MODEL HS060512

JOB _____


ENGINEER _____

CONTRACTOR _____


REP. _____

ITEM NO.	MODEL NO.	IMPELLER DIA.	G.P.M.	HEAD/FT.	H.P.	ELEC. CHAR.
----------	-----------	---------------	--------	----------	------	-------------

WEIGHT _____ PUMP/MOTOR _____

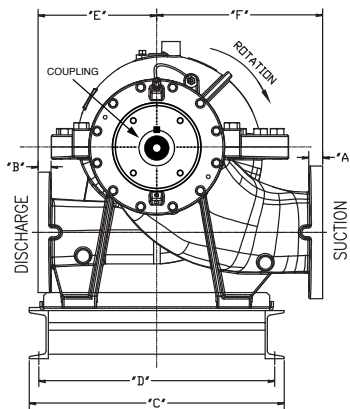


Clockwise Rotation
Viewed from the Motor End
(motor not shown)

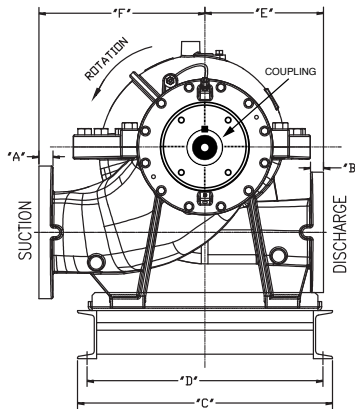

Counterclockwise Rotation
Viewed from the Motor End
(motor not shown)

SPECIFY ROTATION:

- ☐ Clockwise
☐ Counterclockwise

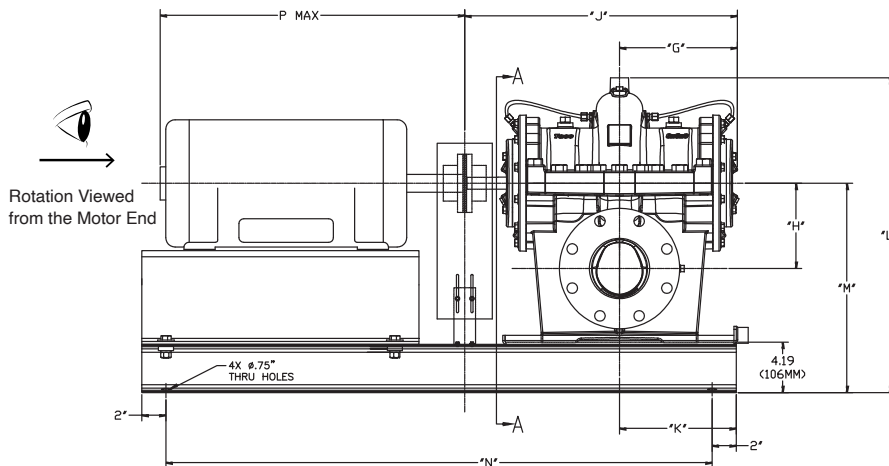

MAXIMUM ASSEMBLY WEIGHT

Motor Frame	Weight Lbs (Kg)
256T	953 (432)
284T	1073 (486)
286T	1088 (493)
324T	1178 (534)
326T	1145 (519)
364T	1576 (714)
365T	1616 (733)

DIMENSIONS

Motor dimensions are approximate and vary by manufacturer and motor type.

			Motor dimensions are approximate and vary by manufacturer and motor type.															
Model No. Flange Size	HP 1760 RPM	NEMA Motor Frame	A SUCTION		B DISCHARGE		C	D	E	F	G	H	J	K	L	M	N	P MAX
			ANSI Class 125	ANSI Class 250	ANSI Class 125	ANSI Class 250												
HS060512 6 x 5 (152 x 127)	20	256T	1.00 (25)	1.44 (37)	0.94 (24)	1.38 (35)	21.17 (538)	19.92 (506)	11.42 (290)	13.19 (335)	9.80 (249)	6.41 (163)	22.63 (575)	9.50 (241)	27.22 (691)	17.58 (447)	48.0 (1219)	23.2 (589)
	25	284T																27.8 (706)
	30	286T																30.3 (770)
	40	324T																
	50	326T																
	60	364T																
	75	365T					23.17 (589)	21.92 (557)									50.0 (1270)	33.4 (848)

Dimensions are subject to change without notice. Do not use for construction purposes unless certified.

MATERIALS OF CONSTRUCTION

Item	Bronze Fitted		Stainless Steel
	Standard Pump Construction		Optional
	125# Flange	250# Flange	125# or 250#
Casing	Cast Iron ASTM A48/A48M-03 Class 30A	Ductile Iron ASTM A536-84 Grade: 65-45-12	N/A
Cover	Cast Iron ASTM A48/A48M-03 Class 30A	Ductile Iron ASTM A536-84 Grade: 65-45-12	N/A
Impeller	Bronze ASTM 584 C83600, C84400 or C87500	Bronze ASTM 584 C83600, C84400 or C87500	N/A
Wear Ring	Bronze ASTM 584 C93200	Bronze ASTM 584 C93200	N/A
Sleeve	Bronze ASTM 584 C93200	Bronze ASTM 584 C93200	N/A
Shaft	Carbon Steel AISI 1045	Carbon Steel AISI 1045	Stainless Steel TYPE 416™ or 410™ ASTM A582
Key	Carbon Steel AISI 1045	Carbon Steel AISI 1045	Stainless Steel AISI 304

N/A - Not Available

OPERATING SPECIFICATIONS

	Standard	Optional
Flange	ANSI Class 125	ANSI Class 250
Pressure	175 PSIG* (1210 KPA)	300 PSIG** (2070 KPA)
Temperature	250°F (120°C)	250°F (120°C)

Motors: All NEMA Standard (T Frame)

* In accordance with ANSI Standard B16.1 Class 125

** In accordance with ANSI Standard B16.1 Class 250 Dim.

FEATURES

	Standard	Optional
Wear Rings	Case Wear Rings	N/A
Seal Flushing	Recirculation Line	Filter & Abrasive Separators
Motors	All Standard NEMA and IEC Motors	
Base	Drip Type Base	
Additional Options	Two Rotation Options	



Model 060512

HS Series


1760 RPM

August 1, 2024

Curve no. 2786

Min. Imp. Dia. 9.0"

Size 6 X 5 X 12

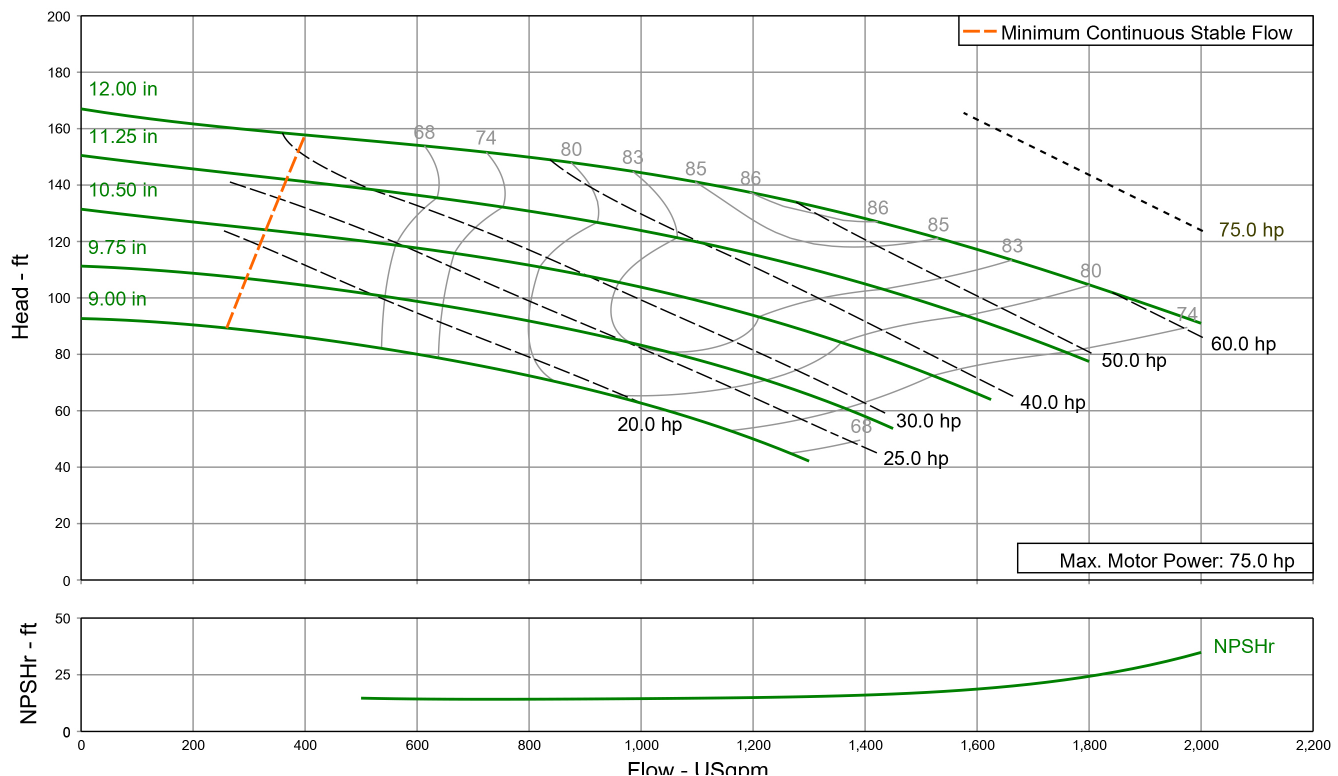

Comments: _____