



Submittal Data Information

101-087

Model 0014-IFC® Cartridge Circulator

Effective: November 24, 2024

Supersedes: January 12, 2015

Job: _____ Engineer: _____ Contractor: _____ Rep: _____

ITEM NO.	MODEL NO.	IMP. DIA.	G.P.M.	HEAD/FT.	H.P.	ELEC. CHAR.

Features

- Integral Flow Check (IFC®)
 - Prevents gravity flow
 - Eliminates separate in-line flow check
 - Reduces installed cost, easy to service
 - Improved performance vs. In-line flow checks
- Unique replaceable cartridge-Field serviceable
- Unmatched reliability-Maintenance free
- Quiet, efficient operation
- Direct drive-Low power consumption
- Self lubricating, No mechanical seal
- Standard high capacity output-Compact design
- Wide range of applications
- Cast Iron or Stainless Steel construction, Flanged connections

Materials of Construction

Casing (Volute): Cast Iron or Stainless Steel
Integral Flow Check:
Body, Plunger.....Acetal
O-ring Seals.....EPDM
Spring.....Stainless Steel
Stator Housing: Aluminum
Cartridge: Stainless Steel
Impeller: Non-Metallic
Shaft: Ceramic
Bearings: Carbon
O-Ring & Gaskets: EPDM

Model Nomenclature

F – Cast Iron, Flanged
SF – Stainless Steel, Flanged
IFC – Integral Flow Check

Performance Data

Maximum Flow: 29 GPM
Maximum Head: 23 Feet
Minimum Fluid Temperature: 40°F (4°C)
Maximum Fluid Temperature: 230°F (110°C)
Maximum Working Pressure: 150 psi
Connection Sizes: 3/4", 1", 1-1/4", 1-1/2" Flanged

Certifications & Listings



FOR INDOOR
USE ONLY





Low-Lead Compliant

Application


The 0014-IFC with an Integral Flow Check is designed to reduce installation costs when zoning with 00° circulators on medium head / medium flow hydronic or radiant heating, hydro-air fan coils or closed loop solar heating systems. By locating the removable, spring-loaded IFC inside the pump casing, a separate in-line flow check is eliminated, reducing installation costs. The reduced pressure drop of the IFC, increases the flow performance over in-line check valves. Both the IFC and cartridge are easily accessed for service instead of replacing the entire unit.

Pump Dimensions & Weights

Model	Casing	A		B		C		D		F		G		Ship Wt.	
		in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	Kg
0014-F1-1 IFC	Cast Iron	7-1/4	184	5-3/4	146	3-1/4	83	3-5/16	84	5-1/2	140	6-1/2	165	13.0	5.9
0014-SF1-IFC	St. Steel	7-1/4	184	5-3/4	146	3-1/4	83	3-5/16	84	5-1/2	140	6-1/2	165	12.0	5.4




Mounting Positions

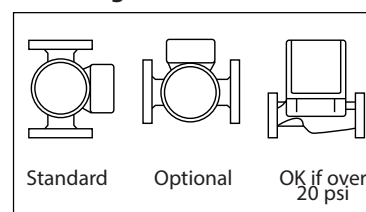


Electrical Data

Model	Volts	Hz	Ph	Amps	RPM	HP
All Models	115	60	1	1.55	3250	1/8
Motor Type	Permanent Split Capacitor Impedance Protected					
Motor Options	220/50/1, 220/60/1, 230/60/1, 100/110/50/60/1					

Flange Orientation



Performance Field - 60Hz

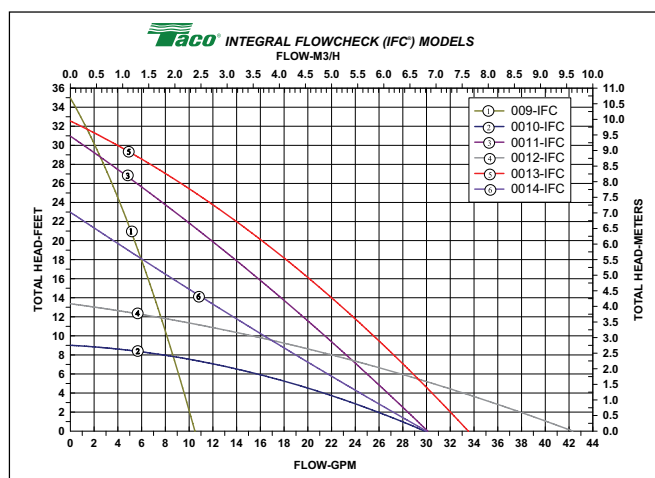

A Taco Group Company

Taco, Inc., 1160 Cranston Street, Cranston, RI 02920 | Tel: (401) 942-8000

Taco (Canada), Ltd., 8450 Lawson Road, Suite #3, Milton, Ontario L9T 0J8 | Tel: (905) 564-9422

Visit our web site: www.TacoComfort.com | Printed in USA | ©2015 Taco, Inc.

