


QuickTop Zone Valve™

Taco® QuickTop Zone Valves provide a convenient way to create individual zones or equipment isolation in closed loop hydronic systems. Utilizing one pump with multiple zone valves, flow can be started or stopped through the system providing individual room or area comfort, control and energy savings. The QuickTop Zone Valve is offered with 3/4" sweat connections, and comes with Taco's trusted quality & reliability.

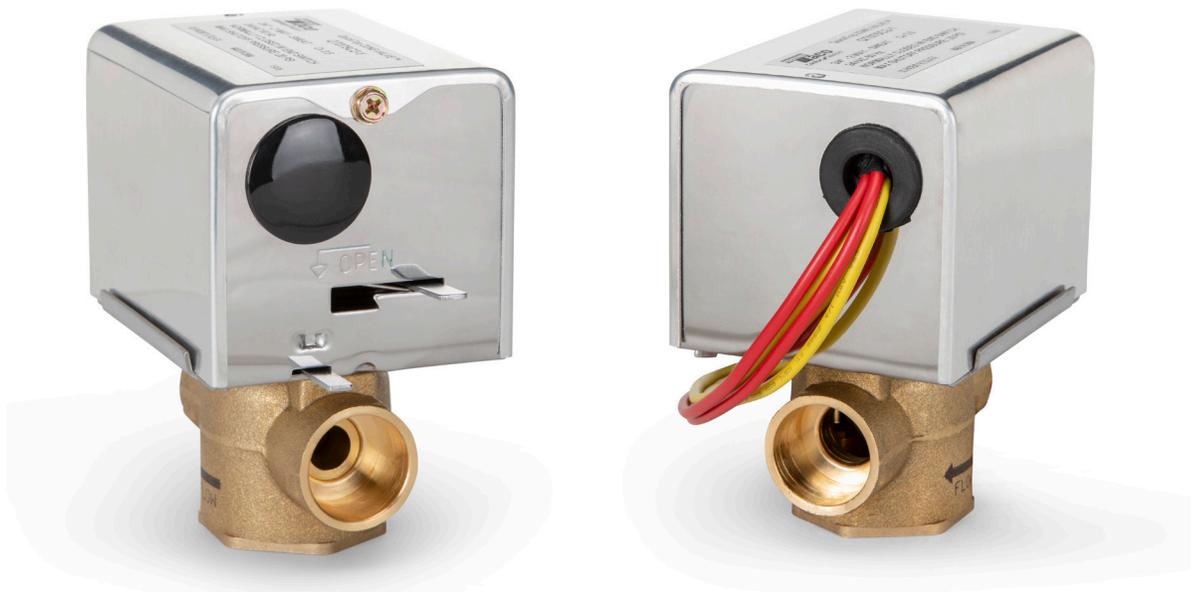

Submittal Data Information QuickTop Zone Valve™

Submittal Data # 101-208
Supersedes: 12/20/18

Effective: 08/17/25


Product Specifications

Static Pressure Rating	300 PSI
Close-off Pressure.....	15 - 20 PSI
Ambient Temperature.....	32° - 125° F
Fluid Temp. Range	32° - 200° F
Service.....	Water or Water/Glycol up to 50% Glycol, Closed Systems
Motor Running Time.....	Power On: 10 - 20 seconds Spring Return: 4 - 5 seconds
Voltage.....	24 VAC ±10%, 60Hz
Power Consumption	5 W, 7.2 VA
Motor Wire Leads	24V, 18" yellow
Humidity	5% - 95% non-condensing
End Switch.....	1 x SPST, red wire

Application

Taco® QuickTop Zone Valves provide on-off, normally closed control in closed hydronic systems. The valves can be used in a wide variety of heating & cooling applications. Use with baseboard, fan coils, radiators, convectors, air handlers, heat pumps and radiant applications.

For Indoor Use Only

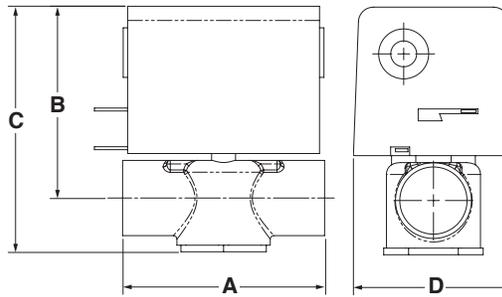

Materials of Construction

Actuator:

HousingStainless Steel base with Al cover

Valve:

Body.....Forged Brass
Stem.....Brass with Nickel-Plate
Seals.....NBR

QuickTop Zone Valve Dimensions: (FOR REFERENCE PURPOSES)

Model Number	Connection Size	Inches (mm)				C _v (K _v)	Close-Off PSI (kPa)
		A	B	C	D		
QT075C2	3/4" Sweat	2-3/4 (70)	3-1/4 (83)	4-3/16 (106)	2-11/16 (68)	3.5 (3.0)	20 (138)

Replacement actuator model number: QTA024W4B1



Taco Inc., 1160 Cranston Street, Cranston, RI 02920 / (401) 942-8000
Taco (Canada) Ltd., 8450 Lawson Road, Unit #3, Milton, Ontario L9T 0J8 / (905) 564-9422