



# Submittal Data Information

## QuickTop Zone Valve™

101-208

Effective: August 17, 2025

Supersedes: December 20, 2018

Job: \_\_\_\_\_ Engineer: \_\_\_\_\_ Contractor: \_\_\_\_\_ Rep: \_\_\_\_\_

ITEM NO.	MODEL NO.	


### Product Specifications

Static Pressure Rating .....	300 PSI
Close-off Pressure.....	15 - 20 PSI
Ambient Temperature.....	32° - 125° F
Fluid Temp. Range .....	32° - 200° F
Service.....	Water or Water/Glycol up to 50% Glycol, Closed Systems
Motor Running Time.....	Power On: 10 - 20 seconds Spring Return: 4 - 5 seconds
Voltage.....	24 VAC ±10%, 60Hz
Power Consumption.....	5 W, 7.2 VA
Motor Wire Leads .....	24V, 18" yellow
Humidity.....	5% - 95% non-condensing
End Switch.....	1 x SPST, red wire

### Application

Taco® QuickTop Zone Valves provide on-off, normally closed control in closed hydronic systems. The valves can be used in a wide variety of heating & cooling applications. Use with baseboard, fan coils, radiators, convectors, air handlers, heat pumps and radiant applications.

**For Indoor Use Only**

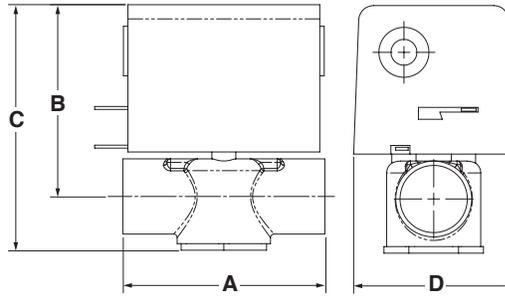

### QuickTop Zone Valve Dimensions: (FOR REFERENCE PURPOSES)

Model Number	Connection Size	Inches (mm)				C <sub>v</sub> (K <sub>v</sub> )	Close-Off PSI (kPa)
		A	B	C	D		
QT075C2	3/4" Sweat	2-3/4 (70)	3-1/4 (83)	4-3/16 (106)	2-11/16 (68)	3.5 (3.0)	20 (138)

Replacement actuator model number: QTA024W4B1

### Materials of Construction

<b>Actuator:</b>	
Housing .....	Stainless Steel base with Al cover
<b>Valve:</b>	
Body .....	Forged Brass
Stem.....	Brass with Nickel-Plate
Seals .....	NBR

