



# Submittal Data Information

## SKS Series SelfSensing Vertical Split Coupled Pumps

301-2299-D

EFFECTIVE: May 05, 2023

SUPERSEDES: January 27, 2020


MODEL SKS2011-1760-5

JOB: \_\_\_\_\_ ENGINEER: \_\_\_\_\_

CONTRACTOR: \_\_\_\_\_ REP: \_\_\_\_\_

| ITEM NO.             | MODEL NO.              | IMPELLER DIA.     |      | G.P.M.        | HEAD/FT | H.P. | ELEC. CHAR. |
|----------------------|------------------------|-------------------|------|---------------|---------|------|-------------|
| Configuration        | DOE Basic Model Number | PEI Value         |      | Energy Rating |         |      |             |
| Pump + Motor + Drive | SKS2011A-A-4P-PD       | PEI <sub>vl</sub> | 0.48 | 52            |         |      |             |

PUMP WITH OPTIONAL SUPPORT STAND

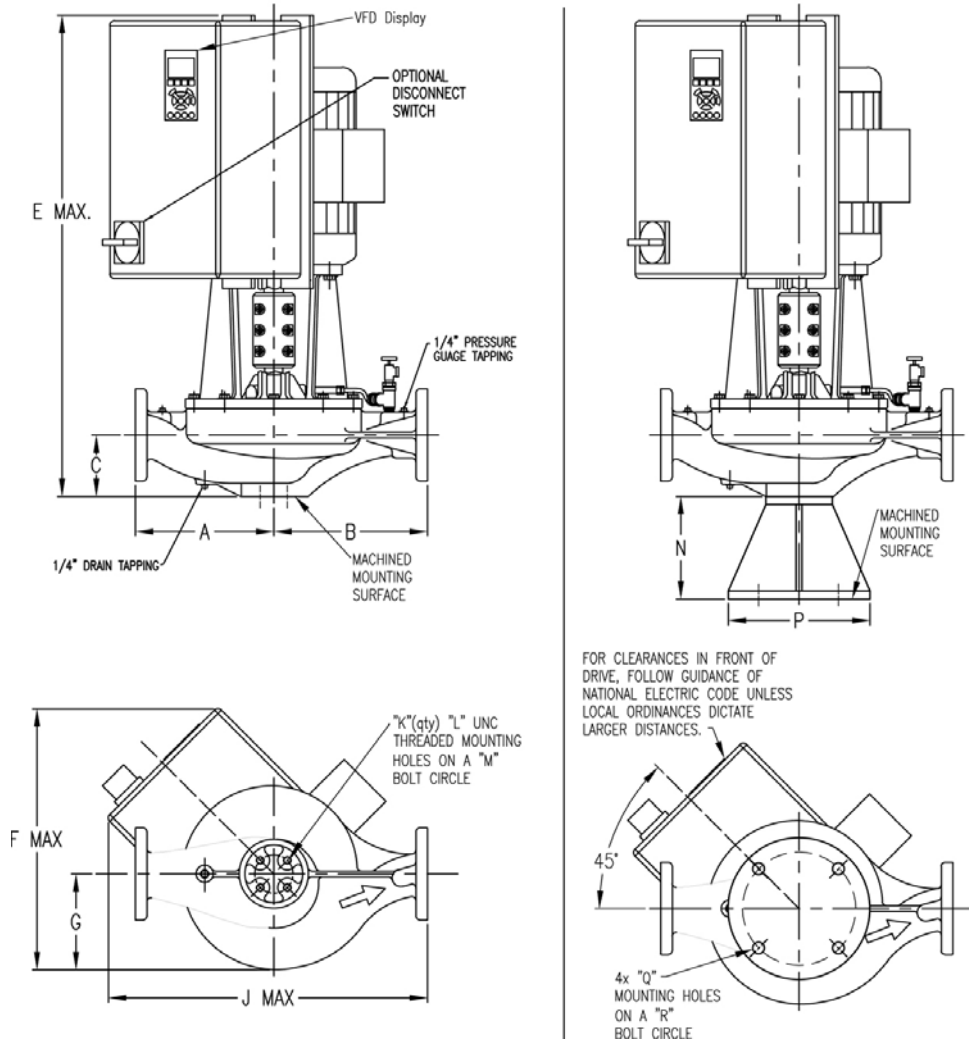

### DIMENSIONS (Dimensions are for both NEMA 12 & NEMA 4X)

\*A & B Dimensions apply for all pump sizes.

| Model No. | Conn.           | Motor Frame | HP 1760 RPM | Flange Size (ASA) | A*                                                   | B*                                                   | C          | E MAX       | F MAX       | G          | J MAX       | K | L      | M         | N          | P          | Q         | R          |
|-----------|-----------------|-------------|-------------|-------------------|------------------------------------------------------|------------------------------------------------------|------------|-------------|-------------|------------|-------------|---|--------|-----------|------------|------------|-----------|------------|
| 2011-5    | 2 x 2 (51 x 51) | 184CZ       | 5           | 2 (51)            | 10.50 (267)<br>ANSI #125<br>10.75 (273)<br>ANSI #250 | 10.85 (276)<br>ANSI #125<br>11.10 (282)<br>ANSI #250 | 3.94 (100) | 37.67 (957) | 28.12 (714) | 7.12 (181) | 31.75 (806) | 4 | 1/2-13 | 2.50 (64) | 6.00 (152) | 9.38 (238) | 0.63 (16) | 7.75 (197) |

English dimensions are in inches. Metric dimensions are in millimeters. Metric data is presented in ( ).  
Do not use for construction purposes unless certified.

# MATERIALS OF CONSTRUCTION

|                 | BRONZE FITTED                              |                                                 |                                                 | ALL IRON                                   |                                                 |                                                 |
|-----------------|--------------------------------------------|-------------------------------------------------|-------------------------------------------------|--------------------------------------------|-------------------------------------------------|-------------------------------------------------|
|                 | Standard Pump Construction                 |                                                 | Optional                                        | Standard Pump Construction                 |                                                 | Optional                                        |
|                 | 125# Flange                                | 250# Flange                                     | 125# or 250#                                    | 125# Flange                                | 250# Flange                                     | 125# or 250#                                    |
| Casing          | Cast Iron<br>ASTM A48/A48M-03<br>Class 30A | Ductile Iron<br>ASTM A536-84<br>Grade: 65-45-12 | N/A                                             | Cast Iron<br>ASTM A48/A48M-03<br>Class 30A | Ductile Iron<br>ASTM A536-84<br>Grade: 65-45-12 | N/A                                             |
| Impeller        | Bronze<br>ASTM B584-98A<br>C87500          | Bronze<br>ASTM B584-98A<br>C87500               | N/A                                             | Cast Iron<br>ASTM A48/A48M-03<br>Class 30A | Cast Iron<br>ASTM A48/A48M-03<br>Class 30A      | N/A                                             |
| Wear Ring       | N/A                                        | N/A                                             | Bronze<br>ASTM B584-98A<br>C92200               | N/A                                        | N/A                                             | N/A                                             |
| Shaft           | Carbon Steel                               | Carbon Steel                                    | Stainless Steel<br>AISI 416<br>ASTM A582        | Carbon Steel                               | Carbon Steel                                    | Stainless Steel<br>AISI 416<br>ASTM A582        |
| Shaft Sleeve    | Bronze ASTM<br>B584-98A<br>C92200          | Bronze ASTM<br>B584-98A<br>C92200               | Stainless Steel<br>TYPE 303 ASTM<br>A276        | Stainless Steel<br>TYPE 303<br>ASTM A276   | Stainless Steel<br>TYPE 303<br>ASTM A276        | N/A                                             |
| Mechanical Seal | Ceramic / EPT                              | Ceramic / EPT                                   | Tungsten Car-<br>bide/EPT                       | Ceramic / EPT                              | Ceramic / EPT                                   | Tungsten Car-<br>bide/EPT                       |
| Seal Flush Line | Copper                                     | Copper                                          | CF                                              | Stainless Steel                            | Stainless Steel                                 | CF                                              |
| Support Stand   | N/A                                        | N/A                                             | Ductile Iron<br>ASTM A536-84<br>Grade: 65-45-12 | N/A                                        | N/A                                             | Ductile Iron<br>ASTM A536-84<br>Grade: 65-45-12 |

CF - Consult Factory

NA - Not Available

# OPERATING SPECIFICATIONS


|             | Standard                |                          | Optional |
|-------------|-------------------------|--------------------------|----------|
| Flange      | ANSI Class 125          | ANSI Class 250           |          |
| Pressure    | 175 PSIG*<br>(1210 KPA) | 300 PSIG**<br>(2070 KPA) | CF       |
| Temperature | 250°F (120°C)           | 250°F (120°C)            | CF       |

\* In accordance with ANSI Standard B16.1 Class 125

\*\* In accordance with ANSI Standard B16.1 Class 250 Dim.

# MAXIMUM ASSEMBLY WEIGHT

| Motor Frame   | Weight without<br>Optional Stand<br>Lbs (Kg) | Weight with<br>Optional Stand<br>Lbs (Kg) |
|---------------|----------------------------------------------|-------------------------------------------|
| 182CZ - 184CZ | 370 (168)                                    | 389 (176)                                 |

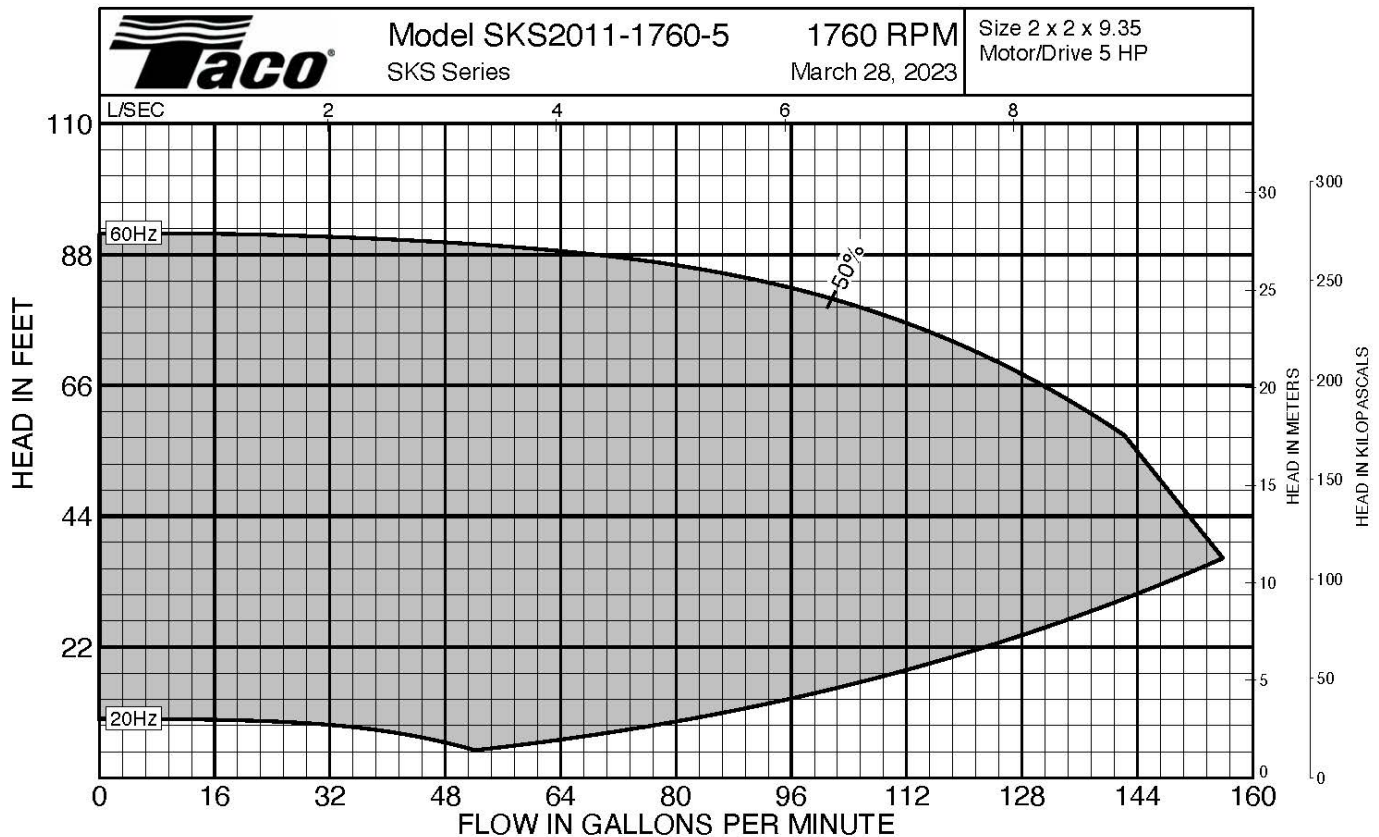

Curves based on Clear Water @ 60F with a Specific Gravity of 1.0

COMMENTS: \_\_\_\_\_

**SPECIFICATIONS:**

| MOTOR DESIGN DATA |    |
|-------------------|----|
| HP                |    |
| Volts             |    |
| Frequency         | Hz |
| Phase             |    |

| DRIVE DATA                 |                                                                                                                                                                                          |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Protocols (Standard)       | BACnet, Modbus RTU, N2 Metasys, FLN Apogee, FC Protocol                                                                                                                                  |
| Protocols (Optional)       | <input type="checkbox"/> LonWorks® <input type="checkbox"/> DeviceNet <input type="checkbox"/> Profibus                                                                                  |
| Enclosure                  | <input type="checkbox"/> NEMA Type 12 / IP55 <input type="checkbox"/> NEMA Type 4X / IP66                                                                                                |
| I/O (Standard)             | 6 Digital Inputs / 2 Digital Outputs<br>1 Analog Current Output / 2 Analog Inputs<br>2 Pulse Inputs<br>2 Form C Relays                                                                   |
| Additional Control Options | <input type="checkbox"/> None <input type="checkbox"/> General Purpose I/O <input type="checkbox"/> Relay Card <input type="checkbox"/> 24VDC Supply <input type="checkbox"/> Analog I/O |
| Disconnect Switch          | <input type="checkbox"/> Mechanical <input type="checkbox"/> Fused                                                                                                                       |
| EMI/RFI Control            | Integrated filter designed to meet EN61800-3                                                                                                                                             |
| Harmonic Suppression       | Dual DC-link chokes (Equivalent: 5% AC line reactor)<br>Supporting IEEE 519-1992 requirements                                                                                            |
| Cooling                    | Fan-cooled through back channel                                                                                                                                                          |
| Ambient Temperature        | -10°C to 45°C up to 1000 meters above sea level<br>-14°F to 113°F up to 3300 feet above sea level                                                                                        |

| CONTROL CONNECTIONS            |                                                             |
|--------------------------------|-------------------------------------------------------------|
| Analog input (follower signal) | 2; selectable voltage or current, direct and inverse acting |
| Digital inputs (programmable)  | 6 (2 can be used as digital outputs)                        |
| Analog outputs (programmable)  | 1; 0/4 to 20 mA                                             |
| Relay outputs (programmable)   | 2 standard Form C 240 V AC, 2 A; 1 or 3 additional optional |
| Auxiliary voltage              | +24 V DC, maximum 200 mA                                    |
| Communication port             | 1 RS485, 1 USB=                                             |

