



Submittal Data Information

TA Series Pumps

301-660

EFFECTIVE: 08/01/24


SUPERSEDES: 04/11/14

3500 RPM MODEL 0624


JOB _____ ENGINEER _____

CONTRACTOR _____ REP. _____


ITEM NO.	MODEL NO.	IMPELLER DIA.	G.P.M.	HEAD/FT.	H.P.	ELEC. CHAR.
----------	-----------	---------------	--------	----------	------	-------------

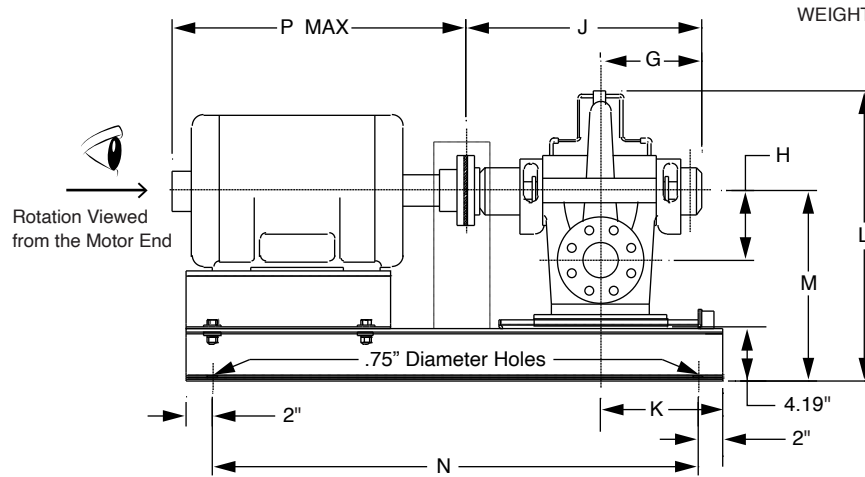

WEIGHT _____ PUMP/MOTOR _____

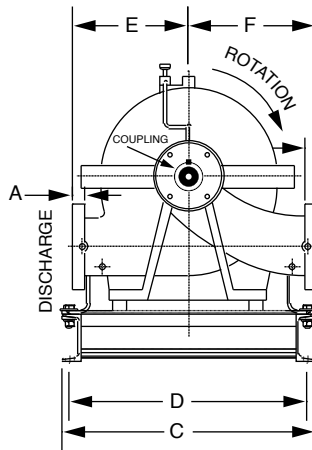

Clockwise Rotation
Viewed from the Motor End
(motor not shown)

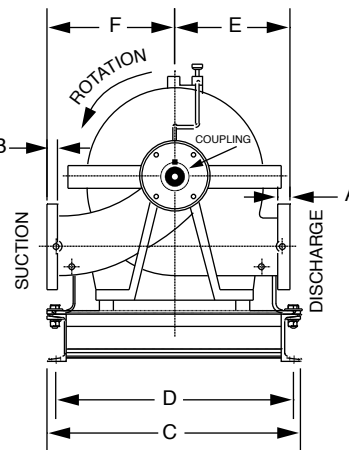

Counterclockwise Rotation
Viewed from the Motor End
(motor not shown)

SPECIFY ROTATION:

- ☐ Clockwise
☐ Counterclockwise

MAXIMUM ASSEMBLY WEIGHT

Motor Frame	Weight Lbs (Kg)
254T - 256T	708 (321)
284TS - 286TS	832 (377)
324TS - 326TS	1025 (465)
364TS - 365TS	1232 (559)

DIMENSIONS

Motor dimensions are approximate and vary by manufacturer and motor type.

Model No. Flange Size	HP 3500 RPM	Motor Frame*	A DISCHARGE		B SUCTION		C	D	E	F	G	H	J	K	L	M	N	P
			ANSI Class 125	ANSI Class 250	ANSI Class 125	ANSI Class 250												
0624 3 x 2.5 (76 x 64)	20	256T	0.69 (18)	1.00 (25)	0.75 (19)	1.12 (28)	21.17 (538)	19.92 (506)	8.88 (226)	11.02 (280)	9.68 (246)	5.12 (130)	22.19 (564)	9.5 (241)	21.31 (541)	14.00 (356)	48.0 (1219)	23.2 (589)
	25	284TS																27.8 (706)
	30	286TS																30.3 (770)
	40	324TS																33.4 (848)
	50	326TS																
	60	364TS																
	75	365TS																

English dimensions are in inches. Metric dimensions are in millimeters. Metric data is presented in ().

Dimensions are subject to change without notice. Do not use for construction purposes unless certified.

* Frame size reflects TEFC enclosure. ODP enclosure is typically one size smaller. Please consult Taco or motor manufacturer for specific frame size for ODP and other non-TEFC enclosures.

MATERIALS OF CONSTRUCTION

Item	Standard	Optional
Casing	Cast Iron ASTM A48 Class 30A	N/A
Impeller	Bronze ASTM B584-836	N/A
Wear Ring	Bronze ASTM B584-836	N/A
Shaft	Carbon Steel AISI 1045	Stainless Steel AISI 420
Insert	Cast Iron ASTM A48 Class 30A	N/A
Shaft Sleeve	Bronze ASTM B584-836	Stainless Steel AISI 420

N/A - Not Available

OPERATING SPECIFICATIONS

	Standard	Optional
Flange	ANSI Class 125	ANSI Class 250
Pressure	175 PSIG* (1210 KPA)	300 PSIG** (2070 KPA)
Temperature	250°F (120°C)	250°F (120°C)

Motors: All NEMA Standard (T Frame)

* In accordance with ANSI Standard B16.1 Class 125

** In accordance with ANSI Standard B16.1 Class 250 Dim.

FEATURES

	Standard	Optional
Wear Rings	Case Wear Rings	N/A
Seal Flushing	Recirculation Line	Filter & Abrasive Separators
Motors	All Standard NEMA Motors	
Base	Drip Type Base	
Additional Options	Packed Stuffing Box Two Rotation Options Balanced Mechanical Seals	




Model 0624

3500 RPM

Curve no. 691
Min. Imp. Dia. 7.10"
Size 2.5 X 3 X 9.5

TA Series

August 1, 2024

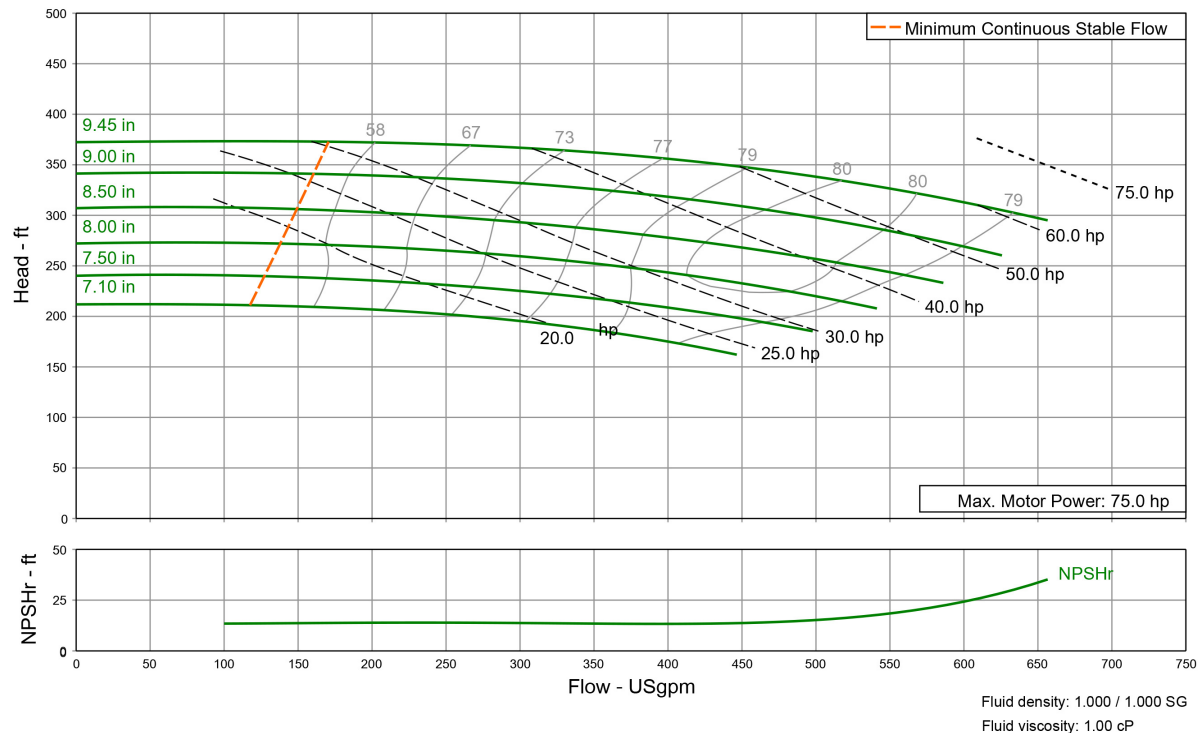

Comments: _____