



Submittal Data Information

TA Series Pumps (50 Hz – NEMA)

301-2056 I

EFFECTIVE: 08/01/24

SUPERSEDES: 01/17/14



1450 RPM MODEL 2530

JOB _____ ENGINEER _____


CONTRACTOR _____ REP. _____

ITEM NO.	MODEL NO.	IMPELLER DIA.	G.P.M.	HEAD/FT.	H.P.	ELEC. CHAR.
----------	-----------	---------------	--------	----------	------	-------------

WEIGHT _____ PUMP/MOTOR _____

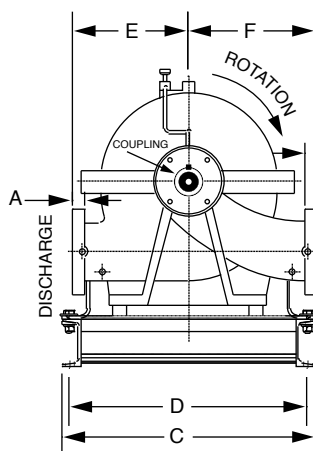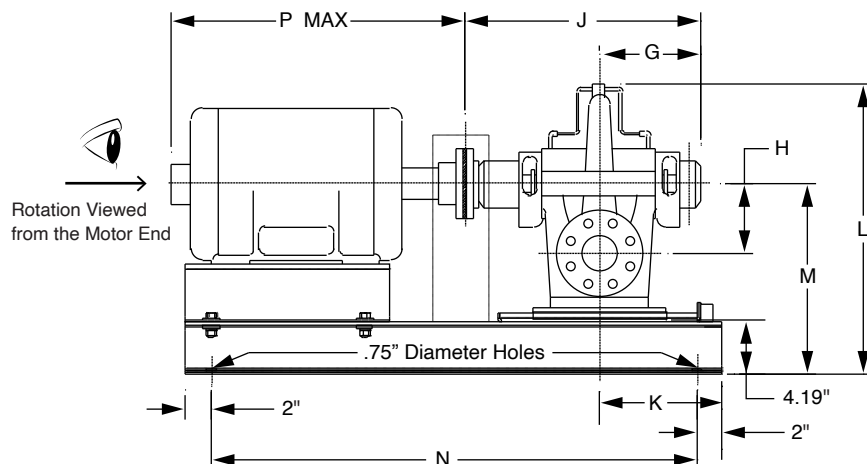

Clockwise Rotation
Viewed from the Motor End
(motor not shown)

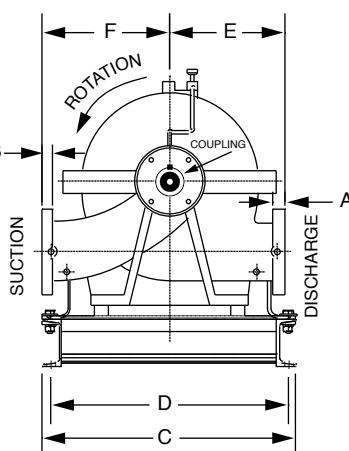

Counterclockwise Rotation
Viewed from the Motor End
(motor not shown)

SPECIFY ROTATION:

- ☐ Clockwise
☐ Counterclockwise

MAXIMUM ASSEMBLY WEIGHT

NEMA Motor Frame	Weight Lbs (Kg)
284T - 286T	2026 (919)
324T - 326T	2182 (990)
364T - 365T	2452 (1112)
404T - 405T	2791 (1266)

DIMENSIONS

Motor dimensions are approximate and vary by manufacturer and motor type.

Model No. Flange Size	HP 1450 RPM	NEMA Motor Frame	A DISCHARGE		B SUCTION		C	D	E	F	G	H	J	K	L	M	N	P
			ANSI Class 125	ANSI Class 250	ANSI Class 125	ANSI Class 250												
2530 10 x 10 (254 x 254)	30	286T	1.19 (30)	1.88 (48)	1.19 (30)	1.88 (48)	23.17 (589)	21.92 (557)	15.75 (400)	16.94 (430)	13.63 (346)	9.81 (249)	31.32 (796)	12.00 (305)	38.06 (967)	25.44 (646)	57.0 (1448)	27.8 (706)
	40	324T																30.3 (770)
	50	326T																33.4 (848)
	60	364T																38.3 (973)
	75	365T																38.3 (973)
	100	404T					27.17 (690)	25.92 (658)						11.56 (294)			60.0 (1524)	38.3 (973)
		405T																

English dimensions are in inches. Metric dimensions are in millimeters. Metric data is presented in ().
Dimensions are subject to change without notice. Do not use for construction purposes unless certified.

MATERIALS OF CONSTRUCTION

Item	Standard	Optional
Casing	Cast Iron ASTM A48 Class 30A	N/A
Impeller	Bronze ASTM B584-836	N/A
Wear Ring	Bronze ASTM B584-836	N/A
Shaft	Carbon Steel AISI 1045	Stainless Steel AISI 420
Insert	Cast Iron ASTM A48 Class 30A	N/A
Shaft Sleeve	Bronze ASTM B584-836	Stainless Steel AISI 420

N/A - Not Available

OPERATING SPECIFICATIONS

	Standard	Optional
Flange	ANSI Class 125	ANSI Class 250
Pressure	175 PSIG* (1210 KPA)	300 PSIG** (2070 KPA)
Temperature	250°F (120°C)	250°F (120°C)

Motors: All NEMA Standard (T Frame)

* In accordance with ANSI Standard B16.1 Class 125

** In accordance with ANSI Standard B16.1 Class 250 Dim.

FEATURES

	Standard	Optional
Wear Rings	CaseWearRings	N/A
Seal Flushing	Recirculation Line	Filter & Abrasive Separators
Motors	All Standard NEMA Motors	
Base	Drip Type Base	
Additional Options	Packed Stuffing Box Two Rotation Options Balanced Mechanical Seals	



Model 2530

1450 RPM


Curve no. 1899

TA Series

August 1, 2024

Min. Imp. Dia. 9.65"

Size 10 X 10 X 12.50

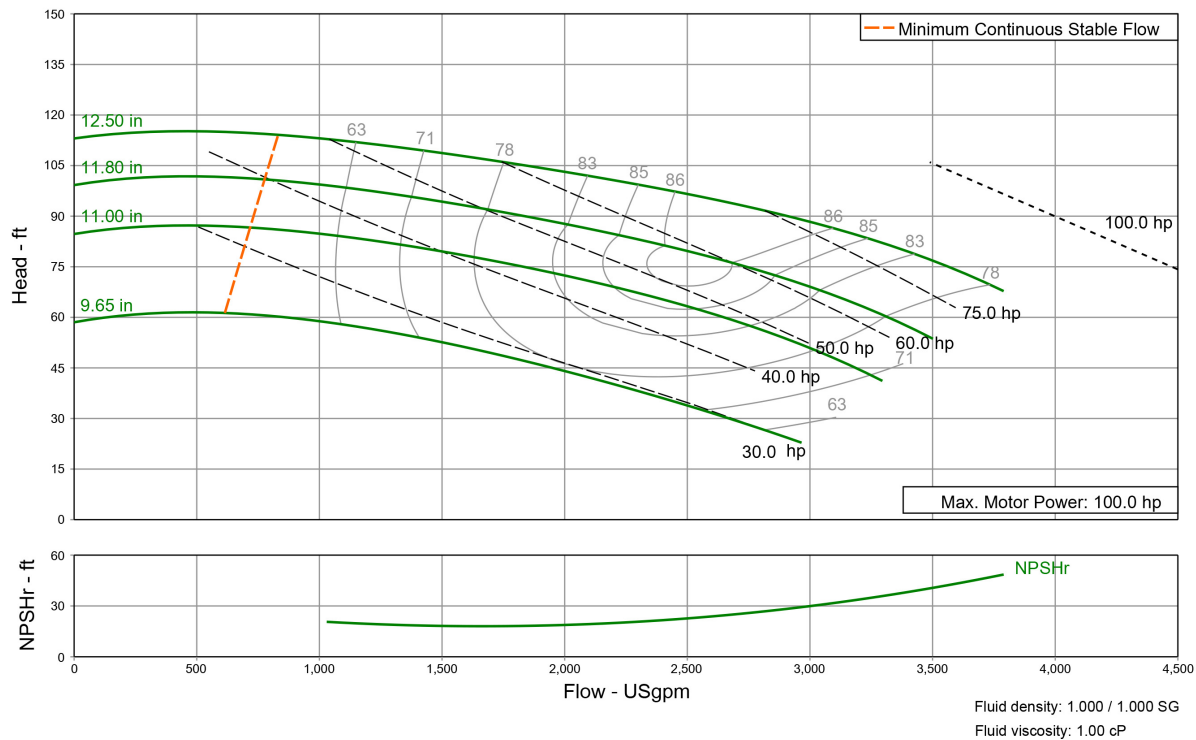

Comments: _____