

TS Series Pump | Submittal Data

Submittal No: 301-1855TS | Model: 100821 | RPM: 1760 - 60 Hz | Effective: 08/01/24 | Supersedes: 04/25/19

JOB: _____

REPRESENTATIVE: _____

ENGINEER: _____

CONTRACTOR: _____

PRODUCT DATA

ITEM NO. _____ MODEL NO. 100821

IMPELLER DIAMETER _____ HORSEPOWER _____

GPM _____ VOLTAGE _____

HEAD/FT _____ RPM 1760

WEIGHT _____ PUMP/MOTOR _____

OPERATING SPECIFICATIONS

	FLANGE	PRESSURE	TEMPERATURE
STANDARD	ANSI Class 125	175 PSIG* (1210 KPA)	250°F (120°C)
OPTIONAL	ANSI Class 250	300 PSIG** (2070 KPA)	250°F (120°C)

* In accordance with ANSI Standard B16.1 Class 125

** In accordance with ANSI Standard B16.1 Class 250 Dim.


DIMENSIONS

Model No. | 100821 - Flange Size (Suction x Discharge) | 10 x 8 (254 x 203)

MOTOR HP & FRAME COMBINATIONS								
HP	300	350	400	450	500	600	700	800
MOTOR FRAME ODP	460 VOLT *	449T			E5008	E5010		E5012
	2300/4160 VOLT	449T	E5008			E5010		E5012
MOTOR FRAME TEFC	460 VOLT *	449T			G5010		G5012	
	2300/4160 VOLT	G5008			G5010		G5012	

MOTOR & FRAME DIMENSIONS							
NEMA MOTOR FRAME	449T	E5008	G5008	E5010	G5010	E5012	G5012
MAX. ASSEMBLY WEIGHT LBS (KG)	6631 (3010)	7351 (3337)	8851 (4018)	8351 (3791)	9701 (4404)	10400 (4717)	10651 (4836)
A** (MAX. VALUE)	53.66 (1363)	60.39 (1534)		67.40 (1712)		75.39 (1915)	
J	8 X 1.1 (8 X 28)						
K	9.33 (237)						
L1	102.36 (2600)	95.28 (2420)	104.33 (2650)	102.36 (2600)	111.42 (2830)		119.69 (3040)
L2	28.87 (733.3)	26.51 (673.3)	29.53 (750)	28.87 (733.3)	31.89 (810)		34.65 (880)
L3							
L4							
M	37.40 (950)						
N	39.76 (1010)						
P	46.85 (1190)						

PUMP DIMENSIONS							
NEMA MOTOR FRAME	449T	E5008	G5008	E5010	G5010	E5012	G5012
B1 Suction	ANSI Class 125: 1.18 (30)						
	ANSI Class 250: 1.89 (48)						
B2 Discharge	ANSI Class 125: 1.10 (28)						
	ANSI Class 250: 1.61 (41)						
C	19.69 (500)						
CC	11.81 (300)						
D	11.81 (300)						
E	27.44 (697)						
F	20.94 (532)						
G	52.64 (1337)						
H	32.95 (837)						
R	2.64 (67)						

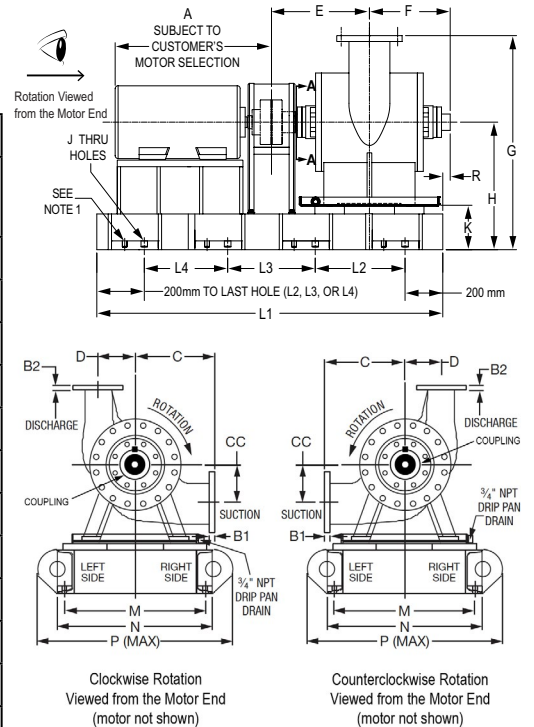

For all customer supplied motors above 449 NEMA frame, a certified motor drawing must be supplied by the customer at time of order entry.

Submittal dimensions for motor frames above 449 NEMA are specific to Baldor Electric Motors only.

English dimensions are in inches. Metric dimensions are in millimeters. Metric data is presented in ().

Dimensions are subject to change without notice. Do not use for construction purposes unless certified.

* Standard voltage is 230/460 for motors up to 100HP.

NOTE 1: Additional set of smaller holes are for alignment. Dimensions not supplied.

** Motor dimensions are approximate and vary by manufacturer and motor type.



MATERIALS OF CONSTRUCTION	CASING	IMPELLER	WEAR RING	SHAFT	SHAFT SLEEVE	MECHANICAL SEAL	SEAL FLUSH LINE
STANDARD	Cast Iron ASTM A48 Class 30A	Stainless Steel AISI 304	Stainless Steel AISI 420	Carbon Steel AISI 1045	Stainless Steel AISI 420	Carbon/Silicon Carbide Viton	N/A
OPTIONAL	N/A	N/A	N/A	Stainless Steel AISI 420	N/A	N/A	Copper

N/A - Not Available



Model 100821


1760 RPM

Curve no. 2549

TC/TS Series

August 1, 2024

Min. Imp. Dia. 15.7"
Size 10 X 8 X 21

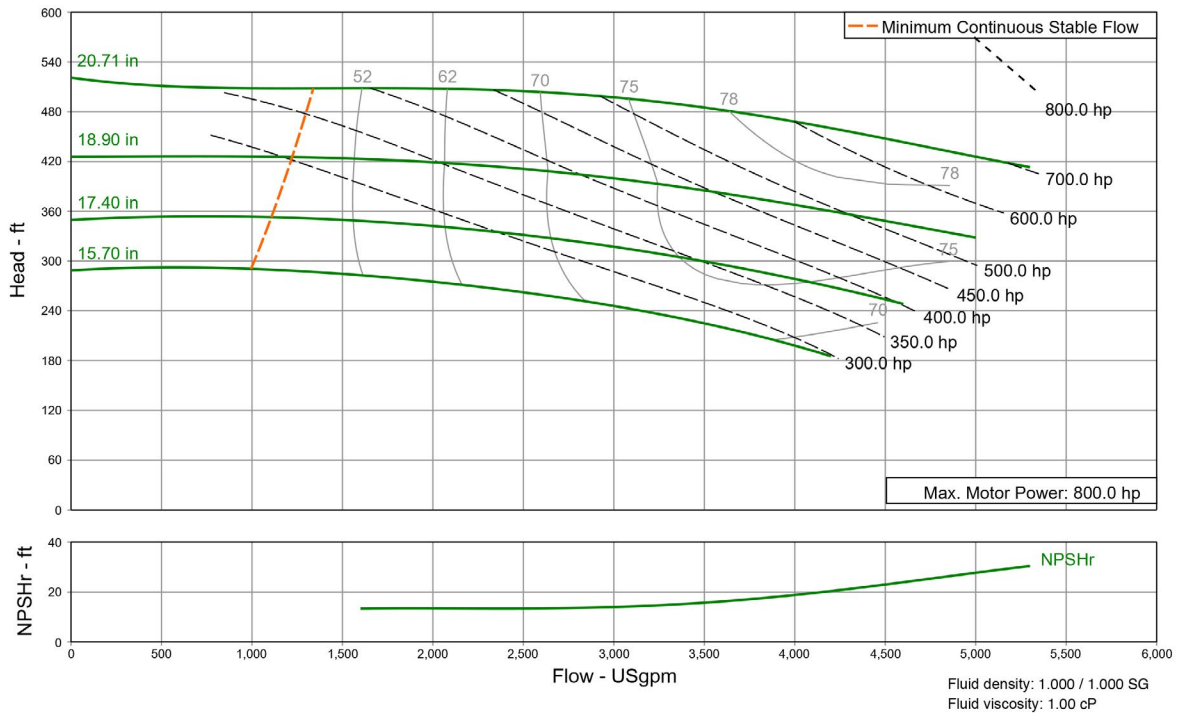

COMMENTS