



Submittal Data Information

HTT Series Heat Exchangers

201-041


4" DIAMETER 2 & 4 PASS

EFFECTIVE: JANUARY 1, 1990

Job: _____

Item No	Model No	Pass	GPM Tubes	Temp. In	Temp. Out	P.D. Tubes	Vel. Tubes	GPM Shell	Temp. In	Temp. Out	P.D. Shell	Vel. Shell

Tube Fluid _____ Shell Fluid _____

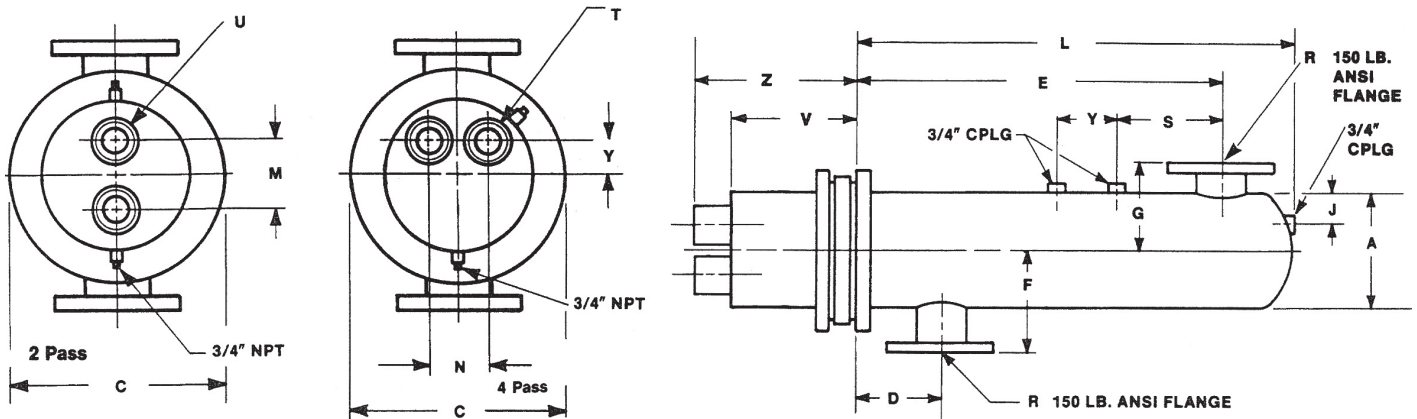

Model Number		Fabricated Steel Heads (threaded)										Dimensions (inches)													Heating Surface (Sq. Ft.)	Approx. Shipping Weight (Lbs.)		
2 Pass	4 Pass	2 Pass					4 Pass					2 and 4 Pass																
		V	Z	M	U		V	Z	N	Y	T		A	C	D	E	F	G	J	L	R	S	Y					
4204HTT	4404HTT	5⅞	6⅞	2⅛	¾T		5⅞	6⅞	1¾	⅞	¾T		4½	10	6	31	5	5	1¼	36½	2½T	13	12					
4206HTT	4406HTT	5⅞	6⅞	2⅛	¾T		5⅞	6⅞	1¾	⅞	¾T		4½	10	6	43	5	5	1¼	48½	2½T	13	12					
4208HTT	4408HTT	5⅞	6⅞	2⅛	¾T		5⅞	6⅞	1¾	⅞	¾T		4½	10	6	55	5	5	1¼	60½	2½T	13	12					
4210HTT	4410HTT	5⅞	6⅞	2⅛	¾T		5⅞	6⅞	1¾	⅞	¾T		4½	10	6	67	5	5	1¼	72½	2½T	13	12					
4212HTT	4412HTT	5⅞	6⅞	2⅛	¾T		5⅞	6⅞	1¾	⅞	¾T		4½	10	6	79	5	5	1¼	84½	2½T	13	12					
4214HTT	4414HTT	5⅞	6⅞	2⅛	¾T		5⅞	6⅞	1¾	⅞	¾T		4½	10	6	91	5	5	1¼	96½	2½T	13	12					

MATERIALS OF CONSTRUCTION (Unless otherwise indicated, standard will be furnished)

	Standard	Optional
Shell	Steel	304ss, 316ss
Head	Fabricated Steel	Fabricated 304ss/316ss
Tubes	3/4x20 BWG 90/10 Cu Ni	304ss, 316ss
Tube Sheet	Steel	304ss, 316ss
Separators	Steel	Naval Brass, 304ss, 316ss, 90/10 Cu Ni
Working Pressure	Tubes 400 psi Shell 150 psi	Consult Factory
Max. Temperature	450°F	Consult Factory

All dimensions shown are subject to change and should not be used for pre-piping. Contact your local Taco representative should certified dimensional drawings be required.

Do it Once. Do it Right.

Taco Inc., 1160 Cranston Street, Cranston, RI 02920 Telephone: (401) 942-8000 Fax: 942-2360

Taco (Canada), Ltd., 6180 Ordan Drive, Mississauga, Ontario L5T 2B3 Telephone: (905) 564-9422 Fax: (905) 564-9436

Visit our website at: www.taco-hvac.com

Printed in USA
Copyright 2007
TACO, Inc.