



Submittal Data Information

HTT Series Heat Exchangers

201-042



6" DIAMETER 6 PASS

EFFECTIVE: JANUARY 1, 1990

Job: _____

Item No	Model No	Pass	GPM Tubes	Temp. In	Temp. Out	P.D. Tubes	Vel. Tubes	GPM Shell	Temp. In	Temp. Out	P.D. Shell	Vel. Shell

Tube Fluid _____ Shell Fluid _____

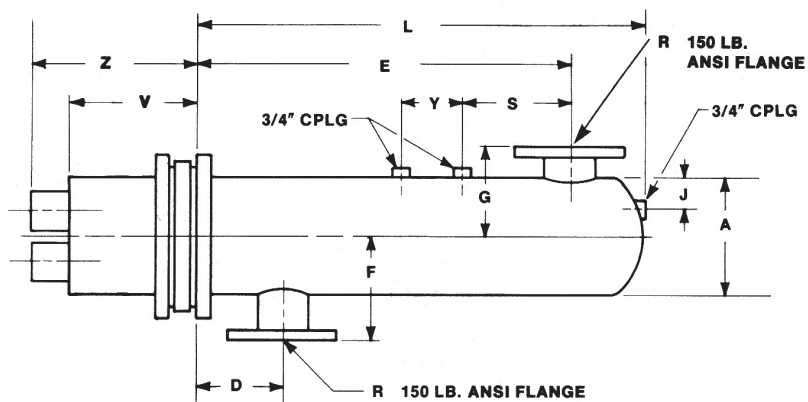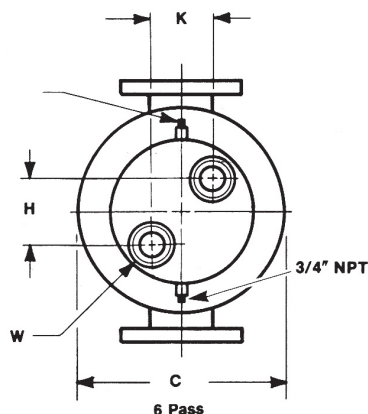

Model Number	Threaded Heads					Dimensions (inches)												Heating Surface (Sq. Ft.)	Approx. Shipping Weight (Lbs.)
6 Pass	6 Pass					6 Pass													
	V	Z	H	K	W	A	C	D	E	F	G	J	L	R	S	Y			
6604HTT	7	7 ¹³ / ₁₆	1½	2¾	1T	6½	12½	6	17½	5½	5½	1¼	25	3T	5½	6	6.9	120	
6606HTT	7	7 ¹³ / ₁₆	1½	2¾	1T	6½	12½	6	29½	5½	5½	1¼	37	3T	11½	12	10.5	146	
6608HTT	7	7 ¹³ / ₁₆	1½	2¾	1T	6½	12½	6	41½	5½	5½	1¼	49	3T	11½	12	14.0	173	
6610HTT	7	7 ¹³ / ₁₆	1½	2¾	1T	6½	12½	6	53½	5½	5½	1¼	61	3T	11½	12	17.5	200	
6612HTT	7	7 ¹³ / ₁₆	1½	2¾	1T	6½	12½	6	65½	5½	5½	1¼	73	3T	11½	12	21.1	227	
6614HTT	7	7 ¹³ / ₁₆	1½	2¾	1T	6½	12½	6	77½	5½	5½	1¼	85	3T	11½	12	24.6	254	
6616HTT	7	7 ¹³ / ₁₆	1½	2¾	1T	6½	12½	6	89½	5½	5½	1¼	97	3T	11½	12	28.1	281	

MATERIALS OF CONSTRUCTION (Unless otherwise indicated, standard will be furnished)

	Standard	Optional
Shell	Steel	304ss, 316ss
Head	Fabricated Steel	Fabricated 304ss/316ss
Tubes	3/4x20 BWG 90/10 Cu Ni	304ss, 316ss
Tube Sheet	Steel	304ss, 316ss
Separators	Steel	Naval Brass, 304ss, 316ss, 90/10 Cu Ni
Working Pressure	Tubes 400 psi Shell 150 psi	Consult Factory Consult Factory
Max. Temperature	450°F	Consult Factory

All units have ASME "U" Stamp on name plate.

All dimensions shown are subject to change and should not be used for pre-piping. Contact your local Taco representative should certified dimensional drawings be required.

Do it Once. Do it Right.

Taco Inc., 1160 Cranston Street, Cranston, RI 02920 Telephone: (401) 942-8000 Fax: 942-2360

Taco (Canada), Ltd., 6180 Ordan Drive, Mississauga, Ontario L5T 2B3 Telephone: (905) 564-9422 Fax: (905) 564-9436

Visit our website at: www.taco-hvac.com

Printed in USA
Copyright 2007
TACO, Inc.