




## JOB DETAILS

JOB: \_\_\_\_\_ REPRESENTATIVE: \_\_\_\_\_

ENGINEER: \_\_\_\_\_ CONTRACTOR: \_\_\_\_\_



## PRODUCT DATA

**MODEL NO.** C11206D    **BacNet**  YES     NO    **MOC** \_\_\_\_\_    **MAX SUCTION** \_\_\_\_\_  
**PRESSURE** 175 PSIG\* (1210 KPA)    **SCCR** 100K    **BREAK TANK** \_\_\_\_\_    **BOOST PRESSURE** \_\_\_\_\_  
**RPM** 3600    **ITEM NO.** \_\_\_\_\_    **VOLTAGE** \_\_\_\_\_  
**FLANGE** ANSI Class 125    **HORSEPOWER** \_\_\_\_\_    **SPLIT** \_\_\_\_\_  
**SYSTEM TYPE** ANSI Class 150    **PUMP/MOTOR** \_\_\_\_\_    **MCA** \_\_\_\_\_  
**REQUIRED SYSTEM PRESSURE** 250°F (120°C)    **RATED SUCTION PRESSURE** \_\_\_\_\_

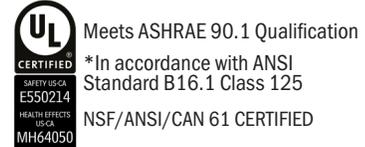

## DIMENSIONS

PUMP MODEL	C11206D							
HORSEPOWER (KW)	3 (2.2)		5 (3.7)		7.5 (5.5)		10 (7.5)	
MOTOR FRAME ODP	145JM		182JM		184JM		213JM	
MAX. WEIGHT LBS (KG)	931 (422)	962 (436)	1012 (459)	1043 (473)	1106 (502)	1136 (515)	1312 (595)	1367 (620)
FLANGE SIZE ASA	3	4	3	4	3	4	4	6
A	8.96 (228)							
B	14.67 (373)	15.41 (392)	14.67 (373)	15.41 (392)	14.67 (373)	15.41 (392)	15.41 (392)	16.61 (422)
C	4.17 (106)		4.17 (106)		4.17 (106)		4.17 (106)	
D	10.26 (261)		12.08 (307)		12.39 (315)		13.86 (352)	
E	41.49 (1054)	42.98 (1092)	41.49 (1054)	42.98 (1092)	41.49 (1054)	42.98 (1092)	42.98 (1092)	45.18 (1148)
F	34.22 (869)	34.96 (888)	34.22 (869)	34.96 (888)	34.22 (869)	34.96 (888)	34.96 (888)	36.16 (918)
G	14.38 (365)	14.38 (365)	14.38 (365)	14.38 (365)	14.38 (365)	14.38 (365)	14.38 (365)	14.38 (365)
H	6.74 (171)	7.48 (190)	6.74 (171)	7.48 (190)	6.74 (171)	7.48 (190)	7.48 (190)	8.68 (220)
J	10.49 (266)	11.98 (304)	10.49 (266)	11.98 (304)	10.49 (266)	11.98 (304)	11.98 (304)	14.18 (360)

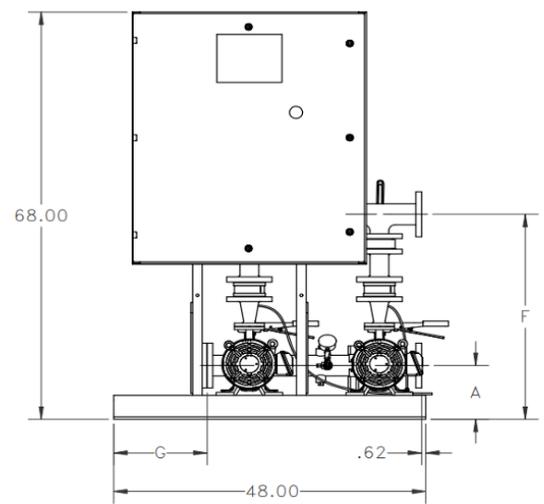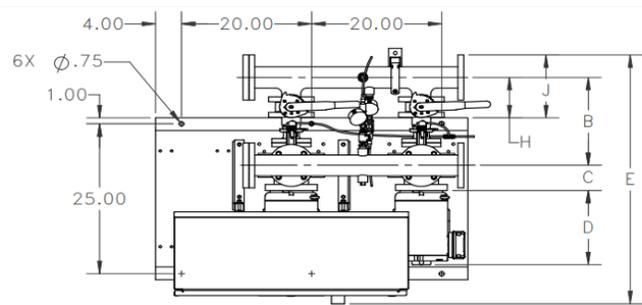



Submittal

### CI PUMP MATERIALS OF CONSTRUCTION

CASING	COVER	IMPELLER	SHAFT	SHAFT SLEEVE	MECHANICAL SEAL
Cast Iron ASTM A48/A48M-03 Class 30A	Cast Iron ASTM A48/A48M-03 Class 30A	Stainless Steel ASTM A351/A351M-08	Stainless Steel TYPE 416"™ ASTM A582	Bronze ASTM B584-98A C92200	Ceramic/EPT

NSF/ANSI/CAN 61-G & 372 CERTIFIED

### COMMENTS